

10/13/00



BIRCH, STEWART, KOLASCH & BIRCH, LLP

INTELLECTUAL PROPERTY LAW
8110 GATEHOUSE ROAD
SUITE 500 EAST
FALLS CHURCH, VA 22042-1210
U S A
(703) 205-8000

FAX: (703) 205-8050
(703) 698-8590 (G IV)

e-mail: mailroom@bskb.com
web: <http://www.bskb.com>

CALIFORNIA OFFICE:
COSTA MESA, CALIFORNIA

THOMAS S. AUCHTERLONIE
JAMES T. ELLER, JR.
SCOTT L. LOWE
MARK J. NUEL, Ph.D.
D. RICHARD ANDERSON
PAUL C. LEWIS
MARK W. MILSTEAD*
RICHARD J. GALLAGHER
JAYNE M. SAYDAH*

REG. PATENT AGENTS.
FREDERICK R. HANDREN
MARYANNE ARMSTRONG, Ph.D.
MAKI HATSUMI
MIKE S. RYU
CRAIG A. McROBBIE
GARTH M. DAHLEN, Ph.D.
LAURA C. LUTZ
ROBERT E. GOOZNER, Ph.D.
HYUNG N. SOHN
MATTHEW J. LATTIG
ALAN PEDERSEN-GILES
C. KEITH MONTGOMERY
TIMOTHY R. WYCKOFF
KRISTI L. RUPERT, Ph.D.
LARRY J. HUME
ALBERT LEE
HRAIR A. SAYADIAN, Ph.D.

TERRELL C. BIRCH
RAYMOND C. STEWART
JOSEPH A. KOLASCH
JAMES M. SLATTERY
BERNARD L. SWEENEY*
MICHAEL K. MUTTER
CHARLES GORENSTEIN
GERALD M. MURPHY, JR.
LEONARD R. SVENSSON
TERRY L. CLARK
ANDREW D. MEIKLE
MARC S. WEINER
JOE MCKINNEY MUNCY
ROBERT J. KENNEY
DONALD J. DALEY
JOHN W. BAILEY
JOHN A. CASTELLANO, III
GARY D. YACURA

OF COUNSEL
HERBERT M. BIRCH (1905-1996)
ELLIOT A. GOLDBERG*
WILLIAM L. GATES*
EDWARD H. VALANCE
RUPERT J. BRADY (RET.)*
F. PRINCE BUTLER
FRED S. WHISENHUNT

*ADMITTED TO A BAR OTHER THAN VA

Date: October 13, 2000
Docket No.: 1190-0467P

JC922 U.S. PTO
09/689653
10/13/00

Assistant Commissioner for Patents
Box PATENT APPLICATION
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application of

Inventor(s): KAGAWA, Shuichi
SUGIURA, Hiroaki

For: COLOR CONVERSION DEVICE AND METHOD OF MANUFACTURING THE
SAME

Enclosed are:

- ☒ A specification consisting of 64 pages
- ☒ 19 sheet(s) of Formal drawings
- ☒ An assignment of the invention
- ☒ Certified copy of Priority Document(s)
- ☒ Executed Declaration ☒ Original ☐ Photocopy
- ☐ A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27
- ☐ Preliminary Amendment
- ☒ Information Disclosure Statement, PTO-1449 and reference(s)

X Other Co-Pending Application Letter

The filing fee has been calculated as shown below:

LARGE ENTITY				SMALL ENTITY	
FOR	NO. FILED	NO. EXTRA	RATE FEE		RATE FEE
BASIC FEE	***** ***** *****	***** ***** *****	***** ***** \$710.00 *****	or	**** **** \$355.00 ****
TOTAL CLAIMS	19 - 20 =	0	x18 =\$ 0.00	or	x 9 = \$ 0.00
INDEPENDENT	2 - 3 =	0	x80 =\$ 0.00	or	x 40 = \$ 0.00
MULTIPLE DEPENDENT CLAIM PRESENTED <u>no</u>			+270 = \$ 0.00	or	+135 = \$ 0.00
			TOTAL \$ 710.00		TOTAL \$ 0.00

X A check in the amount of \$ 750.00 to cover the filing fee and recording fee (if applicable) is enclosed.

— Please charge Deposit Account No. 02-2448 in the amount of \$_____. A triplicate copy of this transmittal form is enclosed.

— No fee is enclosed.

If necessary, the Commissioner is hereby authorized in this, concurrent, and future replies, to charge payment or credit any overpayment to Deposit Account No. 02-2448 for any additional fees required under 37 C.F.R. 1.16 or under 37 C.F.R. 1.17; particularly, extension of time fees.

Respectfully submitted,

BIRCH, STEWART, KOLASCH & BIRCH, LLP

By

Michael K. Mutter #29271
MICHAEL K. MUTTER

Reg. No. 29,380

P. O. Box 747

Falls Church, Virginia 22040-0747

(703) 205-8000
MKM/rem

COLOR CONVERSION DEVICE AND METHOD OF MANUFACTURING THE SAME

BACKGROUND OF THE INVENTION

The present invention relates to data processing used for a full-color printing related equipment such as a printer, a video printer, a scanner or the like, an image processor for forming computer graphic images or a display device such as a monitor. More specifically, the invention relates to a color conversion device for performing color conversion from image data in the form of a first set of three color data of red, green and blue, or cyan, magenta and yellow, to a second set of three color data of red, green and blue, or cyan, magenta and yellow. The invention also relates to a method of manufacturing the color conversion device.

Color conversion in printing is an indispensable technology for compensating deterioration of image quality due to color mixing property due to the fact that the ink is not of a pure color, or the non-linearity (in the hue) of the image-printing, and to output a printed image with a high color reproducibility. Also, in a display device such as a monitor or the like, color conversion is performed in order to output (display) an image having desired color reproducibility in accordance with conditions under which the device is used or the like when an inputted color signal is to be displayed.

Conventionally, two methods have been available for the foregoing color conversion: a table conversion method and a matrix calculation method.

A representative example of the table conversion method is a three-dimensional look-up table method, in which the image data represented by red, green and blue (hereinafter referred to as R, G, and B) are input, to output an image data of R, G, and B stored in advance in a memory, such as a

ROM, or complementary color data of yellow, cyan and magenta (hereinafter referred to as Y, M, and C). Because any desired conversion characteristics can be achieved, color conversion with a good color reproducibility can be performed.

However, in a simple structure for storing data for each combination of image data, a large-capacity memory of about 400 Mbit must be used. For example, even in the case of a compression method for memory capacity disclosed in Japanese Patent Kokai Publication No. S63-227181, memory capacity is about 5 Mbit. Therefore, a problem inherent in the table conversion system is that since a large-capacity memory is necessary for each conversion characteristic, it is difficult to implement the method by means of an LSI, and it is also impossible to deal with changes in the condition under which the conversion is carried out.

On the other hand, in the case of the matrix calculation method, for example, for obtaining printing data of Y, M and C from image data of R, G and B, the following formula (11) is used as a basic calculation formula.

$$\begin{bmatrix} Y \\ M \\ C \end{bmatrix} = (A_{ij}) \begin{bmatrix} R \\ G \\ B \end{bmatrix} \quad \dots (11)$$

Here, A_{ij} represents coefficients, with $i = 1$ to 3, and $j = 1$ to 3.

However, by the simple linear calculation of the formula (11), it is impossible to provide a good conversion characteristic because of a non-linearity of an image-printing or the like.

A method has been proposed for providing a conversion characteristic to improve the foregoing characteristic. This method is disclosed in Japanese Patent Application Kokoku Publication H2-30226, directed to a color correction

calculation device, and employs a matrix calculation formula (12) below.

$$\begin{bmatrix} Y \\ M \\ C \end{bmatrix} = (D_{ij}) \begin{bmatrix} R \\ G \\ B \\ R * G \\ G * B \\ B * R \\ R * R \\ G * G \\ B * B \\ N \end{bmatrix} \quad \dots (12)$$

Here, N is a constant, $i = 1$ to 3, and $j = 1$ to 10.

In the foregoing formula (12), since image data having a mixture of an achromatic component and a color component is directly used, mutual interference occur in computation. In other words, if one of the coefficients is changed, influence is given to the components or hues other than the target component or hue (the component or hue for which the coefficient is changed). Consequently, a good conversion characteristic cannot be realized.

A color conversion method disclosed in Japanese Patent Application Kokai Publication H7-170404 is a proposed solution to this problem. Fig. 19 is a block circuit diagram showing the color conversion method for conversion of image data of R, G and B into printing data of C, M and Y, disclosed in Japanese Patent Application Kokai Publication H7-170404. In the drawing, reference numeral 100 denotes a complement calculator; 101, a minimum and maximum calculator; 102, a hue data calculator; 103, a polynomial calculator; 104, a matrix calculator; 105, a coefficient generator; and 106, a synthesizer.

Next, the operation will be described. The complement calculator 100 receives image data R, G and B, and outputs complementary color data C_i , M_i and Y_i which have been

obtained by determining 1's complements.

The determination of 1's complement of an input data can be achieved by subtracting the value of the input data of n bits (n being an integer) from $(2^n - 1)$. For example, in the case of 8-bit data, the value of the input data is deducted from "255".

The minimum and maximum calculator 101 outputs a maximum value β and a minimum value α of this complementary color data and an identification code S for indicating, among the six hue data, data which are zero.

The hue data calculator 102 receives the complementary color data C_i , M_i and Y_i and the maximum and minimum values β and α , and outputs six hue data r , g , b , y , m and c which are obtained by executing the following subtraction:

$$\begin{aligned} r &= \beta - C_i, \\ g &= \beta - M_i, \\ b &= \beta - Y_i, \\ y &= Y_i - \alpha, \\ m &= M_i - \alpha, \text{ and} \\ c &= C_i - \alpha. \end{aligned}$$

Here, among the six hue data, at least two assume the value zero.

The polynomial calculator 103 receives the hue data and the identification code S , selects, from r , g and b , two data Q_1 and Q_2 which are not zero and, from y , m and c , two data P_1 and P_2 which are not zero. Based on these data, the polynomial calculator 103 computes polynomial data:

$$\begin{aligned} T_1 &= P_1 * P_2, \\ T_3 &= Q_1 * Q_2, \\ T_2 &= T_1 / (P_1 + P_2), \text{ and} \\ T_4 &= T_3 / (Q_1 + Q_2), \end{aligned}$$

and then outputs the results of the calculation.

It is noted that asterisks "*" are sometimes used in this specification to indicate multiplication.

The coefficient generator 105 generates calculation coefficients $U(F_{ij})$ and fixed coefficients $U(E_{ij})$ for the polynomial data based on information of the identification code S . The matrix calculator 104 receives the hue data y , m and c , the polynomial data $T1$ to $T4$ and the coefficients U , and outputs the result of the following formula (13) as color ink data $C1$, $M1$ and $Y1$.

$$\begin{bmatrix} C1 \\ M1 \\ Y1 \end{bmatrix} = (E_{ij}) \begin{bmatrix} c \\ m \\ y \end{bmatrix} + (F_{ij}) \begin{bmatrix} c*m \\ m*y \\ y*c \\ r*g \\ g*b \\ b*r \\ c*m/(c+m) \\ m*y/(m+y) \\ y*c/(y+c) \\ r*g/(r+g) \\ g*b/(g+b) \\ b*r/(b+r) \end{bmatrix} \quad \dots(13)$$

The synthesizer 106 adds together the color ink data $C1$, $M1$ and $Y1$ and data α which is the achromatic data, and outputs printing data C , M and Y . Accordingly, the following formula (14) is used for obtaining printing data.

$$\begin{bmatrix} C \\ M \\ Y \end{bmatrix} = (E_{ij}) \begin{bmatrix} c \\ m \\ y \end{bmatrix} + (F_{ij}) \begin{bmatrix} c*m \\ m*y \\ y*c \\ r*g \\ g*b \\ b*r \\ c*m/(c+m) \\ m*y/(m+y) \\ y*c/(y+c) \\ r*g/(r+g) \\ g*b/(g+b) \\ b*r/(b+r) \end{bmatrix} + \begin{bmatrix} \alpha \\ \alpha \\ \alpha \end{bmatrix} \quad \dots(14)$$

The formula (14) shows a general formula for a group of pixels.

Fig. 20A to Fig. 20F, which are schematic diagrams,

show relations between six hues of red (R), green (G), blue (B), yellow (Y), cyan (C) and magenta (M), and hue data y , m , c , r , g and b . As shown, each hue data relates to three hues (i.e., extends over the range of three hues). For instance the hue data c relates to the hues g , c and b .

Fig. 21A to Fig. 21F, which are schematic diagrams, show relations between the six hues and product terms $y*m$, $r*g$, $c*y$, $g*b$, $m*c$ and $b*r$.

As shown, each of the six product terms $y*m$, $m*c$, $c*y$, $r*g$, $g*b$ and $b*r$ in the formula (14) relates to only one hue among the six hues of red, blue, green, yellow, cyan and magenta. That is, only $y*m$ is an effective product term for red; $m*c$ for blue; $c*y$ for green; $r*g$ for yellow; $g*b$ for cyan; and $b*r$ for magenta.

Also, each of the six fraction terms $y*m/(y + m)$, $m*c/(m + c)$, $c*y/(c + y)$, $r*g/(r + g)$, $g*b/(g + b)$ and $b*r/(b + r)$ in the formula (14) relates to only one hue among the six hues.

As apparent from the foregoing, according to the color conversion method shown in Fig. 19, by changing coefficients for the product terms and the fraction terms regarding the specific hue, only the target hue can be adjusted without influencing other hues.

Each of the foregoing product terms is determined by a second-order computation for chroma, and each of the fraction terms is determined by a first-order computation for chroma. Thus, by using both of the product terms and the fraction terms, the non-linearity of an image-printing for chroma can be adjusted.

However, this color conversion method cannot satisfy a certain desire. That is, depending on the user's preference, if an area in a color space occupied by specific hues is to be expanded or reduced, e.g., specifically, if expansion or reduction in an area of red in a color space

including magenta, red and yellow is desired, the conventional color conversion method of the matrix computation type could not meet such a desire.

The problems of the conventional color conversion method or color conversion device are summarized as follows. Where the color conversion device is of a three-dimensional look-up table conversion method employing a memory such as ROM, a large-capacity memory is required, and a conversion characteristic cannot be flexibly changed. Where the color conversion device is of a type using a matrix calculation method, although it is possible to change only a target hue, it is not possible to vary the color in the inter-hue areas between adjacent ones of the six hues of red, blue, green, yellow, cyan and magenta, and good conversion characteristics cannot be realized throughout the entire color space.

SUMMARY OF THE INVENTION

The present invention was made to solve the foregoing problems.

An object of the present invention is to provide a color conversion device and a color conversion method for performing color-conversion wherein independent adjustment is performed not only for six hues of red, blue, green, yellow, cyan and magenta but also six inter-hue areas of red-yellow, yellow-green, green-cyan, cyan-blue, blue-magenta and magenta-red, and a conversion characteristic can be flexibly changed, and no large-capacity memories, such as three-dimensional look-up tables, are necessary.

According to a first aspect of the invention, there is provided a color conversion device for performing pixel-by-pixel color conversion from a first set of three color data representing red, green and blue, or cyan, magenta and yellow, into a second set of three color data representing

red, green and blue, or cyan, magenta, and yellow, said device comprising:

first calculation means for calculating a minimum value α and a maximum value β of said first set of three color data for each pixel;

hue data calculating means for calculating hue data r, g, b, y, m and c based on said first set of three color data, and said minimum and maximum values α and β outputted from said calculating means;

means for generating first comparison-result data based on the hue data outputted from said hue data calculating means;

means for generating second comparison-result data based on said first comparison-result data;

coefficient storage means for storing matrix coefficients for the hue data, the first comparison-result data and the second comparison-result data;

coefficient setting means for setting specified matrix coefficients in said coefficient storage means; and

second calculation means responsive to said hue data, said first comparison-result data, said second comparison-result data, and the coefficients from said coefficient storage means for calculating said second set of three color data representing red, green and blue, or cyan, magenta, and yellow,

said second calculation means performing calculation including matrix calculation performed at least on said hue data, said first comparison-result data, said second comparison-result data, and the coefficients from said coefficient storage means.

With the above arrangement, it is possible to independently vary not only the colors of the six hues of red, blue, green, yellow, cyan and magenta, but also the colors in the six inter-hue areas of red-yellow, yellow-

green, green-cyan, cyan-blue, blue-magenta, and magenta-red, by independently setting the coefficients relating to the target hue or inter-hue area. Accordingly, it is possible to obtain color conversion methods or color conversion devices which can change the conversion characteristics flexibly, without requiring a large-capacity memory.

Moreover, by making it possible to set the coefficients by the use of the coefficient setting means, it is possible to obtain color reproducibility taking into consideration the characteristics of the output device or the input device with which the color conversion device of the invention is to be used or the color conversion characteristics preferred by the user. The coefficients can be set freely by the user, so as to alter the color reproducibility. This is a significant advantage because different users prefer different color reproducibilities.

The color reproducibility can also be altered when a three-dimensional look-up table is used as in the prior art. However, because a large amount of data, e.g., 5 Mbit, needs to be set, the setting requires considerable time. For instance, if the clock-frequency is 5 MHz, and the data is set using a three-wire serial interface, at least about one second is required. In contrast, according to the invention, the amount of data that needs to be set is several hundred bits. The time required for the setting is at most about 100 microseconds.

A real-time man-machine interface can be therefore achieved, in which the color conversion characteristics are changed a little by little, and the result of the change is observed, until a desired characteristics are obtained.

In the process of manufacturing the display device for displaying the color image, by providing the color conversion device according to the invention in order to absorb the manufacturing variations in the color

reproducibility of a liquid crystal display panel of a liquid crystal display device, it is possible to set the coefficients necessary to compensate for the manufacturing variations in a coefficient storage, e.g., a read-only memory, in a short time.

Accordingly, the color conversion device according to the invention is appropriate from the view-point of mass production.

Moreover, because the second comparison-result data calculated from the first comparison-result data are used as calculation term relating to the inter-hue areas in the matrix calculation, the number of calculation steps required can be reduced than if they are calculated from the hue data r , g , b , y , m , c .

It may be so configured that

said second calculation means performs said matrix calculation on said hue data, said first comparison-result data, said second comparison-result data, and the coefficients from said coefficient storage means, and further includes synthesizing means for adding said minimum value α from said first calculation means to the results of said matrix calculation.

It may be so configured that

said coefficient storage means outputs predetermined matrix coefficients E_{ij} ($i = 1$ to 3 , $j = 1$ to 3), and F_{ij} ($i = 1$ to 3 , $j = 1$ to 12), and

said second calculation means performs the calculation using the hue data, said said first comparison-result data, said second comparison-result data, said minimum value α from said calculating means, and said matrix coefficients to determine said second set of three color data representing red, green and blue, denoted by R_o , G_o and B_o , in accordance with the following formula (1):

$$\begin{bmatrix} Ro \\ Go \\ Bo \end{bmatrix} = (E_{ij}) \begin{bmatrix} r \\ g \\ b \end{bmatrix} + (F_{ij}) \begin{bmatrix} h1r \\ h1g \\ h1b \\ h1c \\ h1m \\ h1y \\ h2ry \\ h2rm \\ h2gy \\ h2gc \\ h2bm \\ h2bc \end{bmatrix} + \begin{bmatrix} \alpha \\ \alpha \\ \alpha \end{bmatrix} \quad \dots(1)$$

wherein h1r, h1g, h1b, h1c, h1m and h1y denote said first comparison-result data, and h2ry, h2rm, h2gy, h2gc, h2bm and h2bc denote said second comparison result data.

It may be so configured that

said coefficient storage means outputs predetermined matrix coefficients E_{ij} ($i = 1$ to 3 , $j = 1$ to 3), and F_{ij} ($i = 1$ to 3 , $j = 1$ to 12), and

said second calculation means performs the calculation using the hue data, said said first comparison-result data, said second comparison-result data, said minimum value α from said calculating means, and said matrix coefficients to determine said second set of three color data representing cyan, magenta and yellow denoted by Co, Mo and Yo, in accordance with the following formula (2):

$$\begin{bmatrix} Co \\ Mo \\ Yo \end{bmatrix} = (E_{ij}) \begin{bmatrix} c \\ m \\ y \end{bmatrix} + (F_{ij}) \begin{bmatrix} h1r \\ h1g \\ h1b \\ h1c \\ h1m \\ h1y \\ h2ry \\ h2rm \\ h2gy \\ h2gc \\ h2bm \\ h2bc \end{bmatrix} + \begin{bmatrix} \alpha \\ \alpha \\ \alpha \end{bmatrix} \quad \dots(2)$$

wherein h1r, h1g, h1b, h1c, h1m and h1y denote said first

comparison-result data, and h2ry, h2rm, h2gy, h2gc, h2bm and h2bc denote said second comparison result data.

It may be so configured that said second calculation means performs said matrix calculation on said hue data, said first comparison-result data, said second comparison-result data, the coefficients from said coefficient storage means, and said minimum value α from said first calculation means.

It may be so configured that

said coefficient storage means outputs predetermined matrix coefficients E_{ij} ($i = 1$ to 3 , $j = 1$ to 3), and F_{ij} ($i = 1$ to 3 , $j = 1$ to 13), and

said second calculation means performs the calculation using the hue data, said said first comparison-result data, said second comparison-result data, said minimum value α from said calculating means, and said matrix coefficients to determine said second set of three color data representing red, green and blue, denoted by R_o , G_o and B_o , in accordance with the following formula (3):

$$\begin{bmatrix} R_o \\ G_o \\ B_o \end{bmatrix} = (E_{ij}) \begin{bmatrix} r \\ g \\ b \end{bmatrix} + (F_{ij}) \begin{bmatrix} h1r \\ h1g \\ h1b \\ h1c \\ h1m \\ h1y \\ h2ry \\ h2rm \\ h2gy \\ h2gc \\ h2bm \\ h2bc \\ \alpha \end{bmatrix} \quad \dots (3)$$

wherein h1r, h1g, h1b, h1c, h1m and h1y denote said first comparison-result data, and h2ry, h2rm, h2gy, h2gc, h2bm and h2bc denote said second comparison result data.

It may be so configured that

said coefficient storage means outputs predetermined matrix coefficients E_{ij} ($i = 1$ to 3 , $j = 1$ to 3), and F_{ij} ($i = 1$ to 3 , $j = 1$ to 13), and

said second calculation means performs the calculation using the hue data, said said first comparison-result data, said second comparison-result data, said minimum value α from said calculating means, and said matrix coefficients to determine said second set of three color data representing cyan, magenta and yellow denoted by Co , Mo and Yo , in accordance with the following formula (4):

$$\begin{bmatrix} Co \\ Mo \\ Yo \end{bmatrix} = (E_{ij}) \begin{bmatrix} c \\ m \\ y \end{bmatrix} + (F_{ij}) \begin{bmatrix} h1r \\ h1g \\ h1b \\ h1c \\ h1m \\ h1y \\ h2ry \\ h2rm \\ h2gy \\ h2gc \\ h2bm \\ h2bc \\ \alpha \end{bmatrix} \quad \dots(4)$$

wherein $h1r$, $h1g$, $h1b$, $h1c$, $h1m$ and $h1y$ denote said first comparison-result data, and $h2ry$, $h2rm$, $h2gy$, $h2gc$, $h2bm$ and $h2bc$ denote said second comparison result data.

It may be so configured that

said first set of three color data represent red, green and blue,

said second set of three color data represent red, green and blue, and

said hue data calculation means calculates the hue data r , g , b , y , m , c by subtraction in accordance with:

$$r = R_i - \alpha,$$

$$g = G_i - \alpha,$$

$$b = B_i - \alpha,$$

$$\begin{aligned}y &= \beta - B_i, \\m &= \beta - G_i, \text{ and} \\c &= \beta - R_i,\end{aligned}$$

wherein R_i , G_i and B_i represent said first set of three color data.

It may be so configured that

said first set of three color data represent cyan, magenta and yellow,

said second set of three color data represent red, green and blue,

said device further comprises means for determining complement of said first set of three color data, and

said hue data calculation means calculates the hue data r , g , b , y , m , c by subtraction in accordance with:

$$\begin{aligned}r &= R_i - \alpha, \\g &= G_i - \alpha, \\b &= B_i - \alpha, \\y &= \beta - B_i, \\m &= \beta - G_i, \text{ and} \\c &= \beta - R_i,\end{aligned}$$

wherein R_i , G_i and B_i represent data produced by the determination of the complement of said first set of three color data.

It may be so configured that

said first set of three color data represent cyan, magenta and yellow,

said second set of three color data represent cyan, magenta and yellow, and

said hue data calculation means calculates the hue data r , g , b , y , m , c by subtraction in accordance with:

$$\begin{aligned}r &= \beta - C_i, \\g &= \beta - M_i, \\b &= \beta - Y_i, \\y &= Y_i - \alpha,\end{aligned}$$

$$m = M_i - \alpha, \text{ and}$$

$$c = C_i - \alpha.$$

wherein C_i , M_i and Y_i represent said first set of three color data.

It may be so configured that

said first set of three color data represent red, green and blue,

said second set of three color data represent cyan, magenta and yellow,

said device further comprises means for determining complement of said first set of three color data, and

said hue data calculation means calculates the hue data r , g , b , y , m , c by subtraction in accordance with:

$$r = \beta - C_i,$$

$$g = \beta - M_i,$$

$$b = \beta - Y_i,$$

$$y = Y_i - \alpha,$$

$$m = M_i - \alpha, \text{ and}$$

$$c = C_i - \alpha.$$

wherein C_i , M_i and Y_i represent data produced by the determination of the complement of said first set of three color data.

With the above arrangement, the hue data calculating means can be configured of means for performing subtraction based on the input image of red, green and blue, or cyan, magenta and yellow and the maximum value β and minimum value α from the first calculation means.

It may be so configured that

said first comparison-result data generating means determines the comparison-result data among the hue data r , g and b , and the comparison-result data among the hue data y , m and c , and

said second comparison-result data generating means comprises multiplying means for multiplying the first

comparison-result data outputted from said first comparison-result data generating means with specific calculation coefficients, and means for determining the comparison-result data based on the outputs of said multiplication means.

With the above arrangement, the first comparison-result data generating means and the second comparison-result data generating means are configured of means for performing comparison, and means for performing multiplication.

It may be so configured that

said first comparison-result data generating means determines the first comparison-result data:

h1r = min (m, y),
 h1g = min (y, c),
 h1b = min (c, m),
 h1c = min (g, b),
 h1m = min (b, r), and
 h1y = min (r, g),

(with min (A, B) representing the minimum value of A and B),

said second comparison-result data generating means determines the second comparison-result data:

h2ry = min (aq1*h1y, ap1*h1r),
 h2rm = min (aq2*h1m, ap2*h1r),
 h2gy = min (aq3*h1y, ap3*h1g),
 h2gc = min (aq4*h1c, ap4*h1g),
 h2bm = min (aq5*h1m, ap5*h1b), and
 h2bc = min (aq6*h1c, ap6*h1m).

With the above arrangement, the first comparison-result data generating means can be configured of means for performing minimum value selection, and the second comparison-result data can be configured of means for performing multiplication and means for performing minimum value selection.

It may be so configured that said multiplying means in

said second comparison-result data generating means performs calculation on said first comparison result-data and said calculation coefficients by setting said calculation coefficients aq_1 to aq_6 and ap_1 to ap_6 to integral values of 2^n , with n being an integer, and by bit shifting.

With the above arrangement, the multiplication can be carried out by means of bit shifting.

It may be so configured that each of said first comparison-result data is determined from two of the hue data and is effective for only one of the six hues of red, green, blue, cyan, magenta and yellow.

With the above arrangement, each of the six hues can be adjusted by varying the coefficients for the first comparison-result data without influencing other hues.

It may be so configured that

each of said second comparison-result data is determined from two of the first comparison-result data and is effective for only one of the six inter-hue areas of red-yellow, yellow-green, green-cyan, cyan-blue, blue-magenta, and magenta-red.

With the above arrangement, each of the six inter-hue areas can be adjusted by varying the coefficients for the second comparison-result data without influencing other inter-hue areas.

It may be so configured that

said coefficient storage means outputs specified matrix coefficients E_{ij} ($i = 1$ to 3 , $j = 1$ to 3) based on a formula (5) below:

$$(E_{ij}) = \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix} \quad \dots (5)$$

With the above arrangement, it is not necessary to multiply the coefficients with the hue data and yet

adjustment can be made only to the target hue or inter-hue area (among the six hues of red, blue, green, yellow, cyan, and magenta, and six inter-hue areas), without influencing other hues or inter-hue areas.

It may be so configured that

said first calculation means calculates a maximum value β and a minimum value α using said first set of three color data, and generates an identification code indicating the hue data which is of a value zero, and

said coefficient storage means outputs said matrix coefficients based on the identification code outputted from said first calculation means, and

said second calculation means performs matrix calculation using the coefficient from said coefficient storage means to produce the second set of three color data based on the identification code outputted from said first calculation means.

With the above arrangement, the number of steps for performing the matrix calculation can be reduced.

According to another aspect of the invention, there is provided a method of manufacturing a color conversion device which is for use with an input or output device and which performs pixel-by-pixel color conversion from a first set of three color data representing red, green and blue, or cyan, magenta and yellow, into a second set of three color data representing red, green and blue, or cyan, magenta, and yellow, said color conversion device comprising:

first calculation means for calculating a minimum value α and a maximum value β of said first set of three color data for each pixel;

hue data calculating means for calculating hue data r , g , b , y , m and c based on said first set of three color data, and said minimum and maximum values α and β outputted from said calculating means;

means for generating first comparison-result data based on the hue data outputted from said hue data calculating means;

means for generating second comparison-result data based on said first comparison-result data;

coefficient storage means for storing coefficients for the hue data, the first comparison-result data and the second comparison-result data; and

second calculation means responsive to said hue data, said first comparison-result data, said second comparison-result data, and the coefficients from said coefficient storage means for calculating said second set of three color data representing red, green and blue, or cyan, magenta, and yellow,

said second calculation means performing calculation including matrix calculation performed at least on said hue data, said first comparison-result data, said second comparison-result data, and the coefficients from said coefficient storage means, said method comprising the steps of:

(a) producing a device which includes the above-recited elements, but in which said coefficients are not stored in said storage means; and

(b) writing said coefficients in said coefficient storage taking into consideration the characteristics of the device with which the color conversion device is to be used.

BRIEF DESCRIPTION OF THE DRAWINGS

In the accompanying drawings:-

Fig. 1 is a block diagram showing an example of configuration of a color conversion device of Embodiment 1 of the present invention;

Fig. 2 is a block diagram showing an example of configuration of a polynomial calculator included in the

color conversion device of Embodiment 1;

Fig. 3 is a table showing an example of the relationship between an identification code S1, and the maximum and minimum values β and α , and hue data whose value is zero, in the color conversion device of Embodiment 1;

Fig. 4 is a table showing the operation of a zero remover of the polynomial calculator in the color conversion device of Embodiment 1;

Fig. 5 is a block diagram showing an example of configuration of a matrix calculator included in the color conversion device of Embodiment 1;

Fig. 6A to Fig. 6F are diagrams schematically showing the relationship between six hues and hue data;

Fig. 7A to Fig. 7F are diagrams schematically showing the relationship between six hues and first comparison-result data in the color conversion device of Embodiment 1;

Fig. 8A to Fig. 8F are diagrams schematically showing the relationship between six inter-hue areas and second comparison-result data in the color conversion device of Embodiment 1;

Fig. 9A to Fig. 9F are diagrams schematically showing how the range of each inter-hue area is changed with the change of the coefficients multiplied at the polynomial calculator is changed;

Fig. 10A and Fig. 10B are tables showing the relationship between respective hues or inter-hue areas, and effective calculation terms or data which relate to and are effective for each hue or inter-hue area;

Fig. 11 is an xy chromaticity diagram illustrating the gamut of the color reproduction of the input color signals and the gamut of a desired color reproduction, for explaining the operation of Embodiment 1;

Fig. 12 is an xy chromaticity diagram illustrating the

gamut of the color reproduction obtained by adjusting the coefficients for the first comparison-result data, together with the gamut of the desired color reproduction, for explaining the operation of Embodiment 1;

Fig. 13 is an xy chromaticity diagram for explaining the gamut of the color reproduction obtained by adjusting the coefficients for the first and second comparison-result data, together with the gamut of the desired color reproduction, for explaining the operation of Embodiment 1;

Fig. 14 is a block diagram showing an example of configuration of a color conversion device of Embodiment 2 of the present invention;

Fig. 15 is a block diagram showing an example of configuration of Embodiment 3 of the present invention;

Fig. 16 is a block diagram showing part of an example of configuration of a matrix calculator included in the color conversion device of Embodiment 3;

Fig. 17 is a block diagram showing an example of configuration of a color conversion device of Embodiment 4 of the present invention;

Fig. 18 is a block diagram showing an example of configuration of a color conversion device of Embodiment 5 of the present invention;

Fig. 19 is a block diagram showing an example of configuration of a conventional color conversion device;

Fig. 20A to Fig. 20F are diagrams schematically showing the relationship between six hues and hue data in the conventional color conversion device; and

Fig. 21A to Fig. 21F are diagrams schematically showing the relationship between six hues and calculation terms in a matrix calculator included in the conventional color conversion device.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Next, the preferred embodiments of the present invention will be described in detail with reference to the accompanying drawings.

Embodiment 1

Fig. 1 is a block diagram showing an example of configuration of a color conversion device of Embodiment 1 of the present invention. The illustrated color conversion device is for converting a first set of three color data representing red, green and blue, denoted by R_i , G_i and B_i , into a second set of three color data, also representing red, green and blue, denoted by R_o , G_o and B_o . A minimum and maximum calculator 1 calculates a maximum value β and a minimum value α of the inputted image data denoted by R_i , G_i and B_i , and generates and outputs an identification code S_1 for indicating, among the six hue data, data which are zero, as will be better understood from the following description. A hue data calculator 2 calculates hue data r , g , b , y , m and c from the image data R_i , G_i and B_i and the outputs from the minimum and maximum calculator 1. The color conversion device further comprises a polynomial calculator 3, a matrix calculator 4, a coefficient storage 5, a synthesizer 6, and a coefficient setting unit 15, which will be described later.

The coefficient setting unit 15 is manipulated by a human operator to freely set the coefficients. It may comprise a combination of a keyboard, a display unit, and a control unit for controlling the display unit, and receiving and processing commands and/or data input by the use of the keyboard.

Fig. 2 is a block diagram showing an example of configuration of the polynomial calculator 3. In Fig. 2, a zero remover 7 removes, from the inputted hue data, data which are of value zero. Minimum selectors 9a, 9b and 9c

select and output the minimum of the input data. A calculation coefficient selector 11 selects from among the coefficients stored in the coefficient storage 5, and outputs the selected coefficients as calculation coefficients based on the identification code S1 from the minimum and maximum calculator 1. The selector may comprise a memory controller, which may be a CPU operating under a control program stored in a program memory, not shown as such. The selector 11 supplies an address signal AD to the coefficient storage 5 to read the data representing the coefficients stored at the memory location designated by the address.

Arithmetic units 10a and 10b perform multiplication between the calculation coefficients represented by the outputs of the calculation coefficient selector 11 and the outputs from the minimum selectors 9a and 9b.

Next, the operation will be described. The inputted image data Ri, Gi and Bi corresponding to the three colors of red, green and blue are sent to the minimum and maximum calculator 1 and the hue data calculator 2. The minimum and maximum calculator 1 calculates and outputs a maximum value β and a minimum value α of the inputted image data Ri, Gi and Bi, and also generates and outputs an identification code S1 for indicating, among the six hue data, data data which are zero.

The hue data calculator 2 receives the inputted image data Ri, Gi and Bi and the maximum and minimum values β and α from the minimum and maximum calculator 1, performs subtraction of

$$\begin{aligned} r &= R_i - \alpha, \\ g &= G_i - \alpha, \\ b &= B_i - \alpha, \\ y &= \beta - B_i, \\ m &= \beta - G_i, \text{ and} \end{aligned}$$

$$c = \beta - R_i,$$

and outputs six hue data r , g , b , y , m and c thus obtained.

The maximum and minimum values β and α calculated by the minimum and maximum calculator 1 are respectively represented as follows:

$$\beta = \text{MAX} (R_i, G_i, B_i)$$

$$\alpha = \text{MIN} (R_i, G_i, B_i)$$

Since the six hue data r , g , b , y , m and c calculated by the hue data calculator 2 are obtained by the subtraction of

$$r = R_i - \alpha,$$

$$g = G_i - \alpha,$$

$$b = B_i - \alpha,$$

$$y = \beta - B_i,$$

$$m = \beta - G_i, \text{ and}$$

$$c = \beta - R_i,$$

at least two among these six hue data are of a value zero. For example, if a maximum value β is R_i and a minimum value α is G_i ($\beta = R_i$, and $\alpha = G_i$), $g = 0$ and $c = 0$. If a maximum value β is R_i and a minimum value α is B_i ($\beta = R_i$, and $\alpha = B_i$), $b = 0$ and $c = 0$. In other words, in accordance with a combination of R_i , G_i and B_i which are the largest and the smallest, respectively, one of r , g and b , and one of y , m and c , i. e., in total two of them have a value zero.

Thus, in the foregoing minimum and maximum calculator 1, the identification code S_1 for indicating, among the six hue data which are zero are generated and outputted. The identification code S_1 can assume one of the six values, depending on which of R_i , G_i and B_i are of the maximum and minimum values β and α . Fig. 3 shows a relationship between the values of the identification code S_1 and the maximum and minimum values β and α of R_i , G_i and B_i and hue data which has a value zero. In the drawing, the values of the identification code S_1 represent just an example, and

the values may be other than those shown in the drawing.

Then, the six hue data r, g, b, y, m and c outputted from the hue data calculator 2 are sent to the polynomial calculator 3, and the hue data r, g and b are also sent to the matrix calculator 4. The polynomial calculator 3 also receives the identification code S1 outputted from the minimum and maximum calculator 1, and performs calculation by selecting, from the hue data r, g and b, two data Q1 and Q2 which are not of a value zero, and from the hue data y, m and c, two data P1 and P2 which are not of a value zero. Next, this operation will be described by referring to Fig. 2.

The hue data from the hue data calculator 2 and the identification code S1 from the minimum and maximum calculator 1 are inputted to the zero remover 7 in the polynomial calculator 3. The zero remover 7 outputs, based on the identification code S1, the two data Q1 and Q2 which are not of a value zero, among the hue data r, g and b and the two data P1 and P2 which are not of a value zero, among the hue data y, m and c. For instance, Q1, Q2, P1 and P2 are determined as shown in Fig. 4, and then outputted. If, for example, the identification code S1 is of a value zero, Q1 and Q2 are obtained from the hue data r and b, and P1 and P2 are obtained from the hue data y and m, so the outputs are given by $Q1 = r$, $Q2 = b$, $P1 = m$ and $P2 = y$. As in the case of Fig. 3, the values of the identification code S1 in Fig. 4 represent just an example, and may be other than those shown in Fig. 4.

The minimum selector 9a selects and outputs the minimum value $T4 = \min(Q1, Q2)$ among the output data Q1 and Q2 from the zero remover 7. The minimum selector 9b selects and outputs the minimum value $T2 = \min(P1, P2)$ among the output data P1 and P2 from the zero remover 7. The outputs of the minimum selectors 9a and 9b are the first comparison-result

data.

The identification code S1 is inputted from the minimum and maximum calculator 1 to the calculation coefficient selector 11, which selects signals indicating calculation coefficients a_q and a_p from among the signals stored in the coefficient storage 5, the selection being made based on the identification code S1, and the coefficient a_q is supplied to the arithmetic unit 10a, and the coefficient a_p is supplied to the arithmetic unit 10b. These calculation coefficients a_q and a_p are used for multiplication with the comparison-result data T4 and T2, and each of the calculation coefficients a_q and a_p can assume one of the six values, corresponding to the value of the identification code S1 shown in Fig. 4. The arithmetic unit 10a receives the comparison-result data T4 from the minimum selector 9a, performs multiplication of $a_q \cdot T4$, and sends the result to the minimum selector 9c. The arithmetic unit 10b receives the comparison-result data T2 from the minimum selector 7, performs multiplication of $a_p \cdot T2$, and sends the result to the minimum selector 9c.

The minimum selector 9c selects and outputs the minimum value $T5 = \min(a_q \cdot T2, a_p \cdot T4)$ of the outputs the arithmetic units 10a and 10b. The output of the minimum value selector 9c is a second comparison-result data.

The polynomial data T2, T4 and T5 outputted from the polynomial calculator 3 are supplied to the matrix calculator 4.

The calculation coefficients U (F_{ij}) and fixed coefficients U (E_{ij}) for the polynomial data are read or outputted from the coefficient storage 5 shown in Fig. 1 based on the identification code S1, and sent to the matrix calculator 4.

The matrix calculator 4 receives the hue data r , g and b from the hue data calculator 2, the polynomial data T2, T4

and T5 from the polynomial calculator 3 and the coefficients U from the coefficient storage 5, and outputs the results of calculation according to the following formula (6) as image data R1, G1 and B1.

$$\begin{bmatrix} R1 \\ G1 \\ B1 \end{bmatrix} = (E_{ij}) \begin{bmatrix} r \\ g \\ b \end{bmatrix} + (F_{ij}) \begin{bmatrix} T2 \\ T4 \\ T5 \end{bmatrix} \quad \dots(6)$$

For (E_{ij}) , $i = 1$ to 3 and $j = 1$ to 3, and for (F_{ij}) , $i = 1$ to 3 and $j = 1$ to 3.

Fig. 5, which is a block diagram, shows an example of configuration of part of the matrix calculator 4. Specifically, it shows how R1 is calculated and outputted. As shown in Fig. 5, the matrix calculator 4 includes multipliers 12a, 12c, 12e and 12f, and adders 13a, 13d and 13e interconnected as illustrated.

Next, the operation of the matrix calculator 4 of Fig. 5 will be described. The multipliers 12a, 12c, 12e and 12f receive the hue data r, the polynomial data T2, T4 and T5 from the polynomial calculator 3 and the coefficients U (E_{ij}) and U (F_{ij}) from the coefficient storage 5, and then output the products thereof. The adder 13a receives the products outputted from the multipliers 12c and 12e, adds the inputted data and outputs the sum thereof. The adder 13d adds the output from the adder 13a and the product outputted from the multiplier 12f. The adder 13e adds the output from the adder 13d and the outputted from the multiplier 12a, and outputs the sum total thereof as image data R1. In the example of configuration shown in Fig. 5, if the hue data r is replaced by the hue data g or b, and coefficients suitable for the respective terms (data) T2, T4 and T5 are used in substitution, image data G1 or B1 can be calculated.

Where it is desired to increase the calculation speed

of the color conversion method or the color conversion device of this embodiment, since parts of the coefficients (Eij) and (Fij) which respectively correspond to the hue data r, g and b are used, the configurations each as shown in Fig. 5 may be used in parallel, so as to perform the matrix calculation at a higher speed.

The synthesizer 6 receives the image data R1, G1 and B1 from the matrix calculator 4 and the minimum value α outputted from the minimum and maximum calculator 1 representing the achromatic data, performs addition, and outputs image data Ro, Go and Bo. The equation used for obtaining the image data color-converted by the color-conversion method of Fig. 1 is therefore given by the following formula (1).

$$\begin{bmatrix} R_o \\ G_o \\ B_o \end{bmatrix} = (E_{ij}) \begin{bmatrix} r \\ g \\ b \end{bmatrix} + (F_{ij}) \begin{bmatrix} h1r \\ h1g \\ h1b \\ h1c \\ h1m \\ h1y \\ h2ry \\ h2rm \\ h2gy \\ h2gc \\ h2bm \\ h2bc \end{bmatrix} + \begin{bmatrix} \alpha \\ \alpha \\ \alpha \end{bmatrix} \quad \dots(1)$$

Here, for (Eij), i = 1 to 3 and j = 1 to 3, and for (Fij), i = 1 to 3 and j = 1 to 12, and

$h1r = \min (m, y),$
 $h1g = \min (y, c),$
 $h1b = \min (c, m),$
 $h1c = \min (g, b),$
 $h1m = \min (b, r),$
 $h1y = \min (r, g),$
 $h2ry = \min (aq1 \cdot h1y, ap1 \cdot h1r),$
 $h2rm = \min (aq2 \cdot h1m, ap2 \cdot h1r),$

$h2gy = \min (aq3 \cdot h1y, ap3 \cdot h1g),$
 $h2gc = \min (aq4 \cdot h1c, ap4 \cdot h1g),$
 $h2bm = \min (aq5 \cdot h1m, ap5 \cdot h1b),$ and
 $h2bc = \min (aq6 \cdot h1c, ap6 \cdot h1b),$

and $aq1$ to $aq6$ and $ap1$ to $ap6$ indicate calculation coefficients selected by the calculation coefficient selector 11 of Fig. 2.

The difference between the number of calculation terms in the formula (1) and the number of calculation terms in Fig. 1 is that Fig. 1 shows a method of calculation for each pixel excluding the calculation terms which are of a value zero, while the formula (1) represents a general formula for a set of pixels. In other words, twelve polynomial data for one pixel of the formula (1) can be reduced to three effective data, and this reduction is achieved by exploiting a characteristic of the hue data.

The combination of effective data is changed according to image data of the target pixel. For all image data, all the polynomial data can be effective.

Fig. 6A to Fig. 6F schematically show relations between the six hues (red, yellow, green, cyan, blue, magenta) and the hue data y , m , c , r , g and b . Each hue data relates to, i.e., extends to cover the range of three hues. For example, y as shown in Fig. 6A relates to, or extends to cover three hues of red, yellow and green.

Each of the foregoing formulae (6) and (1) includes a first comparison-result data effective only for one hue. The first comparison-result data are:

$h1r = \min (y, m),$
 $h1y = \min (r, g)$
 $h1g = \min (c, y),$
 $h1c = \min (g, b),$
 $h1b = \min (m, c),$ and
 $h1m = \min (b, r).$

Fig. 7A to Fig. 7F schematically show relations between the six hues and first comparison-result data $h1r$, $h1y$, $h1g$, $h1c$, $h1b$, and $h1m$. It is seen that each of the first comparison-result data relates to only one specific hue.

For instance, if W is a constant, for red, $r = W$, $g = b = 0$, so that $y = m = W$, and $c = 0$. The other five first comparison-result data are all of a value zero. That is, for red, $h1r = \min(y, m)$ alone is the only effective first comparison-result data. Similarly, $h1g = \min(c, y)$ is the only effective first comparison-result data for green; $h1b = \min(m, c)$ for blue; $h1c = \min(g, b)$ for cyan; $h1m = \min(b, r)$ for magenta; and $h1y = \min(r, g)$ for yellow.

Fig. 8A to Fig. 8F schematically show relations between the six hues and second comparison-result data:

$$\begin{aligned} h2ry &= \min(h1y, h1r), \\ h2gy &= \min(h1y, h1g), \\ h2gc &= \min(h1c, h1g), \\ h2bc &= \min(h1c, h1b), \\ h2bm &= \min(h1m, h1b), \text{ and} \\ h2rm &= \min(h1m, h1r). \end{aligned}$$

This is the case in which the coefficients $aq1$ to $aq6$ and $ap1$ to $ap6$ in

$$\begin{aligned} h2ry &= \min(aq1 \cdot h1y, ap1 \cdot h1r), \\ h2rm &= \min(aq2 \cdot h1m, ap2 \cdot h1r), \\ h2gy &= \min(aq3 \cdot h1y, ap3 \cdot h1g), \\ h2gc &= \min(aq4 \cdot h1c, ap4 \cdot h1g), \\ h2bm &= \min(aq5 \cdot h1m, ap5 \cdot h1b), \text{ and} \\ h2bc &= \min(aq6 \cdot h1c, ap6 \cdot h1b), \end{aligned}$$

in the formula (1) above are all of a value "1".

It can be understood from Fig. 8A to Fig. 8F, that each of the second comparison-result data relates to changes in the six inter-hue areas of red-green, yellow-green, green-cyan, cyan-blue, blue-magenta, and magenta-red. In other words, for red-yellow, $b = c = 0$, and the five terms other

than $h2ry = \min(h1y, h1r) = \min(\min(r, g), \min(y, m))$ are all zero. Accordingly, only $h2ry$ is an effective second comparison-result data for red-yellow. Similarly, only $h2gy$ is an effective second comparison-result data for yellow-green; $h2gc$ for green-cyan; $h2bc$ for cyan-blue; $h2bm$ for blue-magenta; and $h2rm$ for magenta-red.

Moreover, the range of the inter-hue area to which each of the second comparison-result data relates is half that of the range of the hue to which each of the first comparison-result data relates.

Fig. 9A to Fig. 9F schematically show how the range of the six inter-hue area to which each of the second comparison-result data relate is changed when the coefficients $aq1$ to $aq6$ and $ap1$ to $ap6$ used for determination of $h2ry$, $h2rm$, $h2gy$, $h2gc$, $h2bm$ and $h2bc$ according to the foregoing formulae (6) and (1) are changed. The broken lines $a1$ to $a6$ shows the characteristics when $aq1$ to $aq6$ assume values larger than $ap1$ to $ap6$. The broken lines $b1$ to $b6$ shows the characteristics when $ap1$ to $ap6$ assume values larger than $aq1$ to $aq6$.

Specifically, for inter-hue area red-yellow, only $h2ry = \min(aq1 \cdot h1y, ap1 \cdot h1r)$ is an effective second comparison-result data. If, for example, the ratio between $aq1$ and $ap1$ is 2:1, the peak value of the second comparison-result data is shifted toward red, as indicated by the broken line $a1$ in Fig. 9A, and thus it can be made an effective comparison-result data for an area closer to red in the inter-hue area of red-yellow. On the other hand, for example if the ratio between $aq1$ and $ap1$ is 1:2, the relationship is like that indicated by the broken line $b1$ in Fig. 9A, the peak value of the second comparison-result data is shifted toward yellow, and thus it can be made an effective comparison-result data for an area closer to yellow in the inter-hue area of red-yellow. Similarly, by respectively changing:

aq3 and ap3 in h2gy for yellow-green,
 aq4 and ap4 in h2gc for green-cyan,
 aq6 and ap6 in h2bc for cyan-blue,
 aq5 and ap5 in h2bm for blue-magenta and
 aq2 and ap2 in h2rm for magenta-red,
 in the area for which each second comparison-result data is
 most effective can be changed.

Fig. 10A and Fig. 10B respectively show relations between the six hues and inter-hue areas and effective calculation terms. Thus, if the coefficients which are stored in the coefficient storage 5 and which are for a calculation term effective for a hue or an inter-hue area to be adjusted are changed, only the target hue or inter-hue area can be adjusted. Further, if coefficients selected by the calculation coefficient selector 11 in the polynomial calculator 3 are changed, part of the inter-hue area where a calculation term in the inter-hue area is most effective can be changed without giving any influence to the other hues.

Next, an example of coefficients outputted from the coefficient storage 5 of Embodiment 1 described above with reference to Fig. 1 will be described. The following formula (5) shows an example of coefficients U (Eij) outputted from the coefficient storage 5.

$$(E_{ij}) = \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix} \quad \dots (5)$$

If the coefficients U (Fij) in the foregoing formula are all zero this represents the case where color conversion is not executed. The following formula (7) shows the case where, of the coefficients U (Fij), coefficients for first comparison-result data and second comparison-result data are represented by, for example Ar1 to Ar3, Ay1 to Ay3, Ag1 to Ag3, Ac1 to Ac3, Ab1 to Ab3, Am1 to Am3, Ary1 to Ary3, Agy1

to Agy3, Agc1 to Agc3, Abc1 to Abc3, Abm1 to Abm3 and Arm1 to Arm3.

(Fij)

$$= \begin{bmatrix} \text{Ar1} & \text{Ag1} & \text{Ab1} & \text{Ac1} & \text{Am1} & \text{Ay1} & \text{Ary1} & \text{Arm1} & \text{Agy1} & \text{Agc1} & \text{Abm1} & \text{Abc1} \\ \text{Ar2} & \text{Ag2} & \text{Ab2} & \text{Ac2} & \text{Am2} & \text{Ay2} & \text{Ary2} & \text{Arm2} & \text{Agy2} & \text{Agc2} & \text{Abm2} & \text{Abc2} \\ \text{Ar3} & \text{Ag3} & \text{Ab3} & \text{Ac3} & \text{Am3} & \text{Ay3} & \text{Ary3} & \text{Arm3} & \text{Agy3} & \text{Agc3} & \text{Abm3} & \text{Abc3} \end{bmatrix} \quad \dots(7)$$

In the foregoing, adjustment is performed by using the first comparison-result data and second comparison-result data. Accordingly, only a hue or an inter-hue area can be linearly adjusted. If coefficients relating to a first-order calculation term for a hue or an inter-hue area to be adjusted are set to values other than zero, and the other coefficients are made to be zero, only the target hue or inter-hue area can be adjusted. For example, if coefficients Ar1 to Ar3 relating to h1r relating to red are set, the red hue is changed, and to vary the proportion between red and yellow, the coefficients Ary1 to Ary3 relating to h2ry are used.

Furthermore, if, in the polynomial calculator 3, the values of calculation coefficients aq1 to aq6 and ap1 to ap6 in

$$\begin{aligned} \text{h2ry} &= \min (\text{aq1} \cdot \text{h1y}, \text{ap1} \cdot \text{h1r}), \\ \text{h2rm} &= \min (\text{aq2} \cdot \text{h1m}, \text{ap2} \cdot \text{h1r}), \\ \text{h2gy} &= \min (\text{aq3} \cdot \text{h1y}, \text{ap3} \cdot \text{h1g}), \\ \text{h2gc} &= \min (\text{aq4} \cdot \text{h1c}, \text{ap4} \cdot \text{h1g}), \\ \text{h2bm} &= \min (\text{aq5} \cdot \text{h1m}, \text{ap5} \cdot \text{h1b}), \text{ and} \\ \text{h2bc} &= \min (\text{aq6} \cdot \text{h1c}, \text{ap6} \cdot \text{h1b}) \end{aligned}$$

are changed so as to assume integral values of 1, 2, 4, 8, ..., i.e., 2^n (where n is an integer), multiplication can be achieved in the arithmetic units 10a and 10b by bit shifting.

As apparent from the foregoing, by changing the

coefficients for the first comparison-result data relating to specific hues, it is possible to adjust only the target hue among the six hues of red, blue, green, yellow, cyan and magenta, and by changing the coefficients for the second comparison-result data, it is possible to vary the colors in the six inter-hue areas of red-yellow, yellow-green, green-cyan, cyan-blue, blue-magenta, and magenta-red. The adjustment of each hue or inter-hue area can be achieved independently, i.e., without influencing other hues or other inter-hue areas.

Accordingly, it is possible to obtain color conversion methods or color conversion devices which can change the conversion characteristics flexibly, without requiring a large-capacity memory.

Further description on the operation of the color conversion device using the coefficients represented by the formulae (5) and (7) will be given. Fig. 11 to Fig. 13 show an xy chromaticity diagram showing the operation of the color conversion device of Embodiment 1. In Fig. 11 to Fig. 13, the dotted line 21 represents the gamut of the desired color reproduction. In Fig. 11, the triangle of the solid line 22 represents the gamut of color reproduction (reproducible colors) of the input color signals R_i , G_i and B_i . Here, the input color signals may be those for a certain type of image reproducing device, such as a display device, e.g., a CRT monitor. The "desired color reproduction" may be the color reproduction by another type of display device, or theoretical or imaginary color reproduction.

The directions of lines extending from the center of each triangle to the vertexes and points on the sides of the triangle represent respective hues.

In the example of Fig. 11, there are differences between the color reproduction of the input color signals

and the desired color reproduction with regard to the directions of the lines extending from the center of the triangle to the vertexes and points on the sides. This means that the hues of the reproduced colors are different.

The color conversion device of Embodiment 1 of the invention uses the first comparison-result data effective for each of the six hues, and the second comparison-result data effective for each of the inter-hue areas.

In Fig. 12, the solid line 23 represents the gamut of the color reproduction after the adjustment of the coefficients for the first comparison-result data, while the broken line 24 represents the gamut of the color reproduction without the adjustment of the coefficients. As will be seen, the hues of the color reproduction as represented by the solid line 23 and the hues of the desired color reproduction as represented by the dotted line 21 coincide with each other. The coincidence is achieved by adjusting the coefficients for the first comparison-result data. However, it is noted that the gamut of the color reproduction as represented by the solid line 23 is narrower than the gamut of the color reproduction as represented by the broken line 24 (without the adjustment of the coefficients).

Fig. 13 shows the gamut 25 of the color reproduction obtained when both the coefficients for the first comparison-result data and the coefficients for the second comparison-result data are adjusted. By adjusting both the coefficients for the first and second comparison-result data, the hues of the color reproduction as represented by the line 25 coincides with the hues of the desired color reproduction, and the gamut 25 of the color reproduction obtained when both the coefficients for the first and second comparison-result data are identical to the gamut (22 in Fig. 11) of the color reproduction obtained when the

coefficients for the first and second comparison-result data are not adjusted. That is, in the color conversion device according to Embodiment 1 of the invention, by adjusting the coefficients for the first and second comparison-result data, the hues can be adjusted without narrowing the gamut of the color reproduction.

In Embodiment 1 described above, the hue data r , g , b , y , m and c , and the maximum and minimum values β and α were calculated based on the inputted image data R_i , G_i and B_i so as to obtain the calculation terms for the respective hues, and the image data R_o , G_o , B_o are obtained after the calculation according to the formula (1). As an alternative, after the output image data R_o , G_o , B_o are obtained, they may then be converted to data representing cyan, magenta and yellow, by determining 1's complement. In this case, the same effects will be realized.

Furthermore, in Embodiment 1 described above, most of the processing was performed by the hardware configuration of Fig. 1. Needless to say, the same processing can be performed by software in the color conversion device, and in this case, the same effects as those of Embodiment 1 will be provided.

According to the embodiment described above, because the coefficients can be set and/or altered by the use of the coefficient setting unit 15, it is possible to obtain color reproducibility taking into consideration the characteristics of the output device or the input device with which the color conversion device of the invention is to be used or the color conversion characteristics preferred by the user.

The coefficients can be set freely by the user, so as to alter the color reproducibility. This is a significant advantage because different users prefer different color reproducibilities. The color conversion characteristics may

be changed while observing the result of the change by means of a display or a printer, until desired characteristics are obtained.

Embodiment 2

In Embodiment 1, the hue data r , g , b , y , m and c , and the maximum and minimum values β and α were calculated based on the inputted image data of red, green and blue so as to obtain the calculation terms for the respective hues, and after the matrix calculation, the image data red, green and blue were obtained. But the image data of red, green and blue may first be converted into complementary color data of cyan, magenta and yellow, by determining 1's complement of the input image data, and then color conversion may be executed by inputting the complementary color data of cyan, magenta and yellow.

Fig. 14 is a block diagram showing an example of configuration of a color conversion device of Embodiment 2 of the present invention. In describing Embodiment 2, the inputted image data of red, green and blue are denoted by R_j , G_j and B_j . Reference numerals 3, 4, 5, 6, and 15 denote the same members as those described with reference to Fig. 1 in connection with Embodiment 1. Reference numeral 14 denotes a complement calculator; 1b, a minimum and maximum calculator for generating maximum and minimum values β and α of complementary color data and an identification code for indicating, among the six hue data, data which are zero; and 2b, a hue data calculator for calculating hue data r , g , b , y , m and c based on complementary color data C_i , M_i and Y_i from the complement calculator 14 and outputs from the minimum and maximum calculator 1b.

Next, the operation will be described. The complement calculator 14 receives the image data R_j , G_j and B_j , and outputs complementary color data C_i , M_i and Y_i obtained by

determining 1's complements. The minimum and maximum calculator 1b outputs the maximum and minimum values β and α of each of these complementary color data and the identification code S1.

Then, the hue data calculator 2b receives the complementary color data C_i , M_i and Y_i and the maximum and minimum values β and α from the minimum and maximum calculator 1b, performs subtraction of

$$\begin{aligned} r &= \beta - C_i, \\ g &= \beta - M_i, \\ b &= \beta - Y_i, \\ y &= Y_i - \alpha, \\ m &= M_i - \alpha, \text{ and} \\ c &= C_i - \alpha, \end{aligned}$$

and outputs six hue data r , g , b , y , m and c . Here, at least two among these six hue data are zero. The identification code S1 outputted from the minimum and maximum calculator 1b is used for specifying, among the six hue data, data which is zero. The value of the identification code S1 depends on which of C_i , M_i and Y_i the maximum and minimum values β and α are. Relations between the data among the six hue data which are zero, and the values of the identification code S1 are the same as those in Embodiment 1, and thus further explanation will be omitted.

Then, the six hue data r , g , b , y , m and c outputted from the hue data calculator 2b are sent to the polynomial calculator 3, and the hue data c , m and y are also sent to the matrix calculator 4. The polynomial calculator 3 also receives the identification code S1 outputted from the minimum and maximum calculator 1b, and performs calculation by selecting, from the hue data, two data Q1 and Q2 which are not zero, and from the hue data y , m and c , two data P1 and P2 which are not of a value zero. This operation is

identical to that described with reference to Fig. 2 in connection with Embodiment 1, so that detailed description thereof is omitted.

The output of the polynomial calculator 3 is supplied to the matrix calculator 4, and the calculation coefficients $U(F_{ij})$ and fixed coefficients $U(E_{ij})$ for the polynomial data are read or outputted from the coefficient storage 5 in Fig. 14 based on the identification code S1, and sent to the matrix calculator 4.

The matrix calculator 4 receives the hue data c , m and y from the hue data calculator 2b, the polynomial data $T2$, $T4$ and $T5$ from the polynomial calculator 3 and the coefficients U from the coefficient storage 5, and outputs the results of calculation according to the following formula (8) as image data $C1$, $M1$ and $Y1$.

$$\begin{bmatrix} C1 \\ M1 \\ Y1 \end{bmatrix} = (E_{ij}) \begin{bmatrix} c \\ m \\ y \end{bmatrix} + (F_{ij}) \begin{bmatrix} T2 \\ T4 \\ T5 \end{bmatrix} \quad \dots(8)$$

In the formula (8), for (E_{ij}) , $i = 1$ to 3 and $j = 1$ to 3, and for (F_{ij}) , $i = 1$ to 3 and $j = 1$ to 3.

The operation at the matrix calculator 4 is similar to that described with reference to Fig. 5 in connection with Embodiment 1, but the inputted hue data is c (or m , y), and $C1$ (or $M1$, $Y1$) is calculated and outputted. The detailed description thereof is therefore omitted.

The synthesizer 6 receives the image data $C1$, $M1$ and $Y1$ from the matrix calculator 4 and the minimum value α outputted from the minimum and maximum calculator 1b representing the achromatic data, performs addition, and outputs image data C_0 , M_0 and Y_0 . The equation used for obtaining the image data color-converted by the color-conversion method of Fig. 14 is therefore given by the following formula (2).

$$\begin{bmatrix} Co \\ Mo \\ Yo \end{bmatrix} = (E_{ij}) \begin{bmatrix} c \\ m \\ y \end{bmatrix} + (F_{ij}) \begin{bmatrix} h1r \\ h1g \\ h1b \\ h1c \\ h1m \\ h1y \\ h2ry \\ h2rm \\ h2gy \\ h2gc \\ h2bm \\ h2bc \end{bmatrix} + \begin{bmatrix} \alpha \\ \alpha \\ \alpha \end{bmatrix} \quad \dots (2)$$

In the formula (2), for (E_{ij}) , $i = 1$ to 3 and $j = 1$ to 3, and for (F_{ij}) , $i = 1$ to 3 and $j = 1$ to 12, and

$h1r = \min(m, y),$
 $h1g = \min(y, c),$
 $h1b = \min(c, m),$
 $h1c = \min(g, b),$
 $h1m = \min(b, r),$
 $h1y = \min(r, g),$
 $h2ry = \min(aq1 \cdot h1y, ap1 \cdot h1r),$
 $h2rm = \min(aq2 \cdot h1m, ap2 \cdot h1r),$
 $h2gy = \min(aq3 \cdot h1y, ap3 \cdot h1g),$
 $h2gc = \min(aq4 \cdot h1c, ap4 \cdot h1g),$
 $h2bm = \min(aq5 \cdot h1m, ap5 \cdot h1b),$ and
 $h2bc = \min(aq6 \cdot h1c, ap6 \cdot h1b),$ and

$aq1$ to $aq6$ and $ap1$ to $ap6$ indicate calculation coefficients generated by the calculation coefficient selector 11 of Fig. 2.

The difference between the number of calculation terms in the formula (2) and the number of calculation terms in Fig. 14 is that Fig. 14 shows a method of calculation for each pixel excluding the calculation terms which are of a value zero, while the formula (2) represents a general formula for a set of pixels. In other words, twelve polynomial data for one pixel of the formula (2) can be

reduced to three effective data, and this reduction is achieved by exploiting a characteristic of the hue data.

The combination of effective data is changed according to image data of the target pixel. For all image data, all the polynomial data can be effective.

The calculation terms outputted from the polynomial calculator based on the formula (2) are identical to those of the formula (1) in Embodiment 1. Thus, relations between the six hues and inter-hue areas and effective calculation terms are the same as those shown in Fig. 10A and Fig. 10B. Therefore, as in Embodiment 1, in the coefficient storage 5, by changing the coefficients for an effective calculation term for a hue or for an inter-hue area to be adjusted, only the target hue or inter-hue area can be adjusted. In addition, by changing the coefficients in the calculation coefficient selector 11 in the polynomial calculator 3, part of the inter-hue area where the calculation term in the inter-hue area is effective can be changed without giving any influence to the other hues.

Here, an example of coefficients outputted from by the coefficient storage 5 of Embodiment 2 are the coefficients $U(E_{ij})$ of the formula (5), as in Embodiment 1. If the coefficients $U(F_{ij})$ are all zero, color conversion is not executed.

Also, by performing the adjustment based on the coefficients for the first and second comparison-result data, of the coefficients $U(F_{ij})$ of the formula (7), adjustment on only a hue or an inter-hue area can be achieved. By setting coefficients relating to a calculation term for a hue or an inter-hue area to be changed and setting other coefficients to zero, only the target hue or inter-hue area can be adjusted.

As apparent from the foregoing, by changing the coefficients for the first comparison-result data relating

to specific hues, it is possible to adjust only the target hue among the six hues of red, blue, green, yellow, cyan and magenta, and by changing the coefficients for the second comparison-result data, it is possible to vary the colors in the six inter-hue areas of red-yellow, yellow-green, green-cyan, cyan-blue, blue-magenta, and magenta-red. The adjustment of each hue or inter-hue area can be achieved independently, i.e., without influencing other hues or other inter-hue areas.

Accordingly, it is possible to obtain color conversion methods or color conversion devices which can change the conversion characteristics flexibly, without requiring a large-capacity memory.

Furthermore, in Embodiment 2 described above, most of the processing was performed by the hardware configuration of Fig. 14. Needless to say, the same processing can be performed by software in the color conversion device, and in this case, the same effects as those of Embodiment 2 will be provided.

Embodiment 3

In Embodiment 1, part of an example of configuration of the matrix calculator 4 is as shown in the block diagram of Fig. 5, and the hue data and the respective calculation terms and the minimum value α among the image data R_i , G_i and B_i which is achromatic data are added together to produce the image data R_o , G_o , B_o , as shown in the formula (1). It is possible to adopt a configuration shown in Fig. 15 in which coefficients for the minimum value α which is achromatic data are outputted from the coefficient storage and the matrix calculation is performed on the minimum value α as well, to adjust the achromatic component.

Fig. 15 is a block diagram showing an example of configuration of a color conversion device of Embodiment 3

of the present invention. In the figure, reference numerals 1, 2, 3, and 15 denote members identical to those described with reference to Fig. 1 in connection with Embodiment 1. Reference numeral 4b denotes a matrix calculator, and 5b denotes a coefficient storage.

The operation will next be described. The determination of the maximum value β , the minimum value α , and the identification code S1 from the inputted data at the minimum and maximum calculator 1, the calculation of the six hue data at the hue data calculator 2, and the determination of the calculation terms at the polynomial calculator 3 are identical to those of Embodiment 1, and detailed description thereof is therefore omitted.

The calculation coefficients U (Fij) and fixed coefficients U (Eij) for the polynomial data are read or outputted from the coefficient storage 5b shown in Fig. 15 based on the identification code S1, and sent to the matrix calculator 4b. The matrix calculator 4b receives the hue data r, g, and b from the hue data calculator 2, the polynomial data T2, T4 and T5 from the polynomial calculator 3, the minimum value α from the minimum and maximum calculator 1, and the coefficients U from the coefficient storage 5b, and performs calculation thereon. The equation used for the calculation, for adjusting the achromatic component as well, is represented by the following formula (9).

$$\begin{bmatrix} Ro \\ Go \\ Bo \end{bmatrix} = (Eij) \begin{bmatrix} r \\ g \\ b \end{bmatrix} + (Fij) \begin{bmatrix} T2 \\ T4 \\ T5 \\ \alpha \end{bmatrix} \quad \dots(9)$$

In the formula (9), for (Eij), $i = 1$ to 3 and $j = 1$ to 3, and for (Fij), $i = 1$ to 3 and $j = 1$ to 4.

Fig. 16 is a block diagram showing an example of

configuration of the matrix calculator 4b. In Fig. 16, reference numerals 12a, 12c, 12e, 12f, 13a, 13d and 13e denote members identical to those in the matrix calculator 4 of Embodiment 1. Reference numeral 12g denotes a multiplier receiving the minimum value α from the minimum and maximum calculator 1 indicating the achromatic component, and the coefficients U from the coefficient storage 5b, and performs multiplication thereon. Reference numeral 13f denotes an adder.

Next, the operation will be described. The multipliers 12a, 12c, 12e and 12f receive the hue data r, the polynomial data T2, T4 and T5 from the polynomial calculator 3 and the coefficients U (Eij) and U (Fij) from the coefficient storage 5, and then output the products thereof. The adders 13a, 13d and 13e add the products and sums. These operations are identical to those of the matrix calculator 4 in Embodiment 1. The multiplier 12g receives the minimum value α among the image data Ri, Gi and Bi, from the minimum and maximum calculator 1 which corresponds to the achromatic component, and the coefficients U (Fij) from the coefficient storage 5b, and performs multiplication, and outputs the product to the adder 13f, where the product is added to the output of the adder 13e, and the sum total is output as the image data Ro. In the example of Fig. 16, if the hue data r is replaced by g or b, the image data Go or Bo is calculated.

The part of the coefficients (Eij) and (Fij) corresponding to the hue data r, g and b are used. In other words, if three configurations, each similar to that of Fig. 16, are used in parallel for the hue data r, g and b, matrix calculation can be performed at a higher speed.

The equation for determining the image data is represented by the following formula (3).

$$\begin{bmatrix} Ro \\ Go \\ Bo \end{bmatrix} = (E_{ij}) \begin{bmatrix} r \\ g \\ b \end{bmatrix} + (F_{ij}) \begin{bmatrix} h1r \\ h1g \\ h1b \\ h1c \\ h1m \\ h1y \\ h2ry \\ h2rm \\ h2gy \\ h2gc \\ h2bm \\ h2bc \\ \alpha \end{bmatrix} \quad \dots (3)$$

In the formula (3), for (E_{ij}) , $i = 1$ to 3 and $j = 1$ to 3, and for (F_{ij}) , $i = 1$ to 3 and $j = 1$ to 13.

The difference between the number of calculation terms in the formula (3) and the number of calculation terms in Fig. 15 is that, as in Embodiment 1, Fig. 15 shows a method of calculation for each pixel excluding the calculation terms which are of a value zero, while the formula (3) represents a general formula for a set of pixels. In other words, thirteen polynomial data for one pixel of the formula (3) can be reduced to four effective data, and this reduction is achieved by exploiting a characteristic of the hue data.

The combination of effective data is changed according to image data of the target pixel. For all image data, all the polynomial data can be effective.

If all the coefficients relating to the minimum value α are "1", the achromatic data is not converted, and will be of the same value as the achromatic data in the inputted data. If the coefficients used in the matrix calculation are changed, it is possible to choose between reddish black, bluish black, and the like, and the achromatic component can be adjusted.

As apparent from the foregoing, by changing the coefficients for the first comparison-result data relating

to specific hues, and the second comparison-result data relating to the inter-hue areas, it is possible to adjust only the target hue or inter-hue area among the six hues of red, blue, green, yellow, cyan and magenta, and the six inter-hue areas, without influencing other hues and inter-hue areas. By changing the coefficients relating to the minimum value α which is the achromatic data, it is possible to adjust only the achromatic component without influencing the hue components, and choose between a standard black, reddish black, bluish black and the like.

In Embodiment 3 described above, the image data Ro, Go and Bo are obtained after the calculation according to the formula (3). As an alternative, after the output image data Ro, Go, Bo are obtained, they may then be converted to data representing cyan, magenta and yellow, by determining 1's complement. If the coefficients used in the matrix calculation can be changed for the respective hues, the inter-hue areas, and the minimum value α which is achromatic data, effects similar to those discussed above can be obtained.

As in Embodiment 1 described above, in Embodiment 3, as well, the same processing can be performed by software in the color conversion device, and in this case, the same effects as those of Embodiment 3 will be provided.

Embodiment 4

Embodiment 2 was configured to add the hue data, the calculation terms, and the minimum value α which is achromatic data, as shown in the formula (2). As an alternative, the configuration may be such that coefficients for the minimum value α which is achromatic data is outputted from the coefficient storage and the matrix calculation is performed on the minimum value α as well, as shown in Fig. 17, so that the achromatic component is

thereby adjusted.

Fig. 17 is a block diagram showing an example of configuration of color conversion device according to Embodiment 4 of the invention. In the figure, reference numerals 14, 1b, 2b, 3, and 15 denote members identical to those described with reference to Fig. 14 in connection with Embodiment 2, and reference numerals 4b and 5b denote members identical to those described with reference to Fig. 15 in connection with Embodiment 3.

The operation will next be described. The image data R_j , G_j , B_j are input to the complement calculator 14 to obtain the complementary data C_i , M_i , Y_i by the process of determining 1's complement. The determination of the maximum value β , the minimum value α and the identification code S_1 at the minimum and maximum calculator 1b, the calculation of the six hue data at the hue data calculator 2b, and the determination of the calculation terms at the polynomial calculator 3 are identical to those in the case of the complementary data C_i , M_i , Y_i in Embodiment 2. The detailed description thereof are therefore omitted.

The calculation coefficients $U(F_{ij})$ and the fixed coefficients $U(E_{ij})$ for the polynomial data are read or outputted from the coefficient storage 5b in Fig. 17 based on the identification code S_1 , and sent to the matrix calculator 4b.

The matrix calculator 4b receives the hue data c , m , and y from the hue data calculator 2b, the polynomial data T_2 , T_4 and T_5 from the polynomial calculator 3, the minimum value α from the minimum and maximum calculator 1, and the coefficients U from the coefficient storage 5b, and performs calculation thereon. The equation used for the calculation, for adjusting the achromatic component as well, is represented by the following formula (10).

$$\begin{bmatrix} Co \\ Mo \\ Yo \end{bmatrix} = (E_{ij}) \begin{bmatrix} c \\ m \\ y \end{bmatrix} + (F_{ij}) \begin{bmatrix} T2 \\ T4 \\ T5 \\ \alpha \end{bmatrix} \quad \dots(10)$$

In the formula (10), for (E_{ij}) , $i = 1$ to 3 and $j = 1$ to 3, and for (F_{ij}) , $i = 1$ to 3 and $j = 1$ to 4.

The operation at the matrix calculator 4b is similar to that described with reference to Fig. 16 in connection with Embodiment 3, but the inputted hue data is c (or m , y), and C (or M , Y) is calculated and outputted. The detailed description thereof is therefore omitted.

The equation for determining the image data is represented by the following formula (4).

$$\begin{bmatrix} Co \\ Mo \\ Yo \end{bmatrix} = (E_{ij}) \begin{bmatrix} c \\ m \\ y \end{bmatrix} + (F_{ij}) \begin{bmatrix} h1r \\ h1g \\ h1b \\ h1c \\ h1m \\ h1y \\ h2ry \\ h2rm \\ h2gy \\ h2gc \\ h2bm \\ h2bc \\ \alpha \end{bmatrix} \quad \dots(4)$$

In the formula (4), for (E_{ij}) , $i = 1$ to 3 and $j = 1$ to 3, and for (F_{ij}) , $i = 1$ to 3 and $j = 1$ to 13.

The difference between the number of calculation terms in the formula (4) and the number of calculation terms in Fig. 17 is that, as in Embodiment 2, Fig. 17 shows a method of calculation for each pixel excluding the calculation terms which are of a value zero, while the formula (4) represents a general formula for a set of pixels. In other words, thirteen polynomial data for one pixel of the formula (4) can be reduced to four effective data, and this

reduction is achieved by exploiting a characteristic of the hue data.

The combination of effective data is changed according to image data of the target pixel. For all image data, all the polynomial data can be effective.

If all the coefficients relating to the minimum value α are "1", the achromatic data is not converted, and will be of the same value as the achromatic data in the inputted data. If the coefficients used in the matrix calculation are changed, it is possible to choose between reddish black, bluish black, and the like, and the achromatic component can be adjusted.

As apparent from the foregoing, by changing the coefficients for the first comparison-result data relating to specific hues, and the second comparison-result data relating to the inter-hue areas, it is possible to adjust only the target hue or inter-hue area among the six hues of red, blue, green, yellow, cyan and magenta, and the six inter-hue areas, without influencing other hues and inter-hue areas. By changing the coefficients relating to the minimum value α which is the achromatic data, it is possible to adjust only the achromatic component without influencing the hue components, and choose between a standard black, reddish black, bluish black and the like.

As in Embodiment 1 described above, in Embodiment 4, as well, the same processing can be performed by software in the color conversion device, and in this case, the same effects as those of Embodiment 4 will be provided.

Embodiment 5

In Embodiment 2 and Embodiment 4, the image data C_i , M_i , Y_i are obtained by determining 1's complement of input image data R_j , G_j and B_j . Similarly, the image data R_i , G_i , B_i used in Embodiment 1 may be those obtained by 1's

complement of input image data representing cyan, magenta and yellow, C_j , M_j and Y_j . For the determination of the 1's complement of the input image data C_j , M_j , Y_j , a complement calculator which is similar to the complement calculator 14 in Fig. 14 or Fig. 17 but which receives the image data C_j , M_j , Y_j may be used. Fig. 18 shows an example of color conversion device having such a complement calculator denoted 14b. Apart from the addition of the complement calculator 14b, the configuration of the color conversion device of Fig. 18 is similar to the color conversion device of Fig. 1. Similar modification may be made to the color conversion device of Embodiment 3 shown in Fig. 15.

It should also be noted that the modifications described in connection with Embodiment 1 to Embodiment 4 can also be applied to Embodiment 5.

In the various embodiments described above, it is assumed that the invention is applied to a color conversion device for use with an image output device such as a display device or a printer. However, the invention can also be applied to a color conversion device for use with a camera, a scanner, or other image input device, and yet the effects similar to those described above can be obtained.

In the various embodiments described above, the coefficient storage 5 or 5b may be in the form of a random access memory, a read-only memory, an electrically erasable/programmable read-only memory (EEPROM), registers, or of any other configuration, as long as it can store predetermined values.

Embodiment 6

When a read-only memory is used as the coefficient storage 5 or 5b, the coefficient setting unit 15 may not form part of the color conversion device, but is part of a manufacturing device. In such a case, the color conversion

device is manufactured in the following way.

First, a color conversion device which may be any one of those of Embodiment 1 to Embodiment 5, but which does not include the coefficient setting unit 15, and of which the contents of the coefficient storage 5 or 5b have not been set is produced.

Then, taking into consideration the characteristics of the device (which may be an output device, such as a display device or a printer, or an input device such as a camera or an image scanner) with which the color conversion device is intended to be used, the coefficients are determined and written in the coefficient storage 5 or 5a. Here, the characteristics of the input device or the output device in question may be those which vary depending on the type of the device, or those which vary depending on the manufacturing variations.

For writing the coefficients in the coefficient storage 5 or 5b, a coefficient setting unit 15, which in this case is part of a manufacturing device, is used.

By making it possible to set the coefficients by the use of the coefficient setting unit 15, it is possible to obtain color reproducibility taking into consideration the characteristics of the output device or the input device with which the color conversion device of the invention is to be used.

The color conversion characteristics may be changed, while observing the result of the change by means of a display unit, or a printer, until a desired characteristics are obtained.

When the color conversion device is used with a particular display device (this includes a case where the color conversion device is integral with the display device), it is desirable that the color conversion characteristics are changed and the result of the change are

observed using the particular display device. Similarly, when the color conversion device is used with a particular printer, it is desirable that the color conversion characteristics are changed and the result of the change are observed using the particular printer.

In this way, the coefficients can be optimized in a short time. The coefficients may be set so as to be most appropriate for the particular input or output device, or to compensate for the manufacturing variations in the characteristics of the input device or the output device.

Accordingly, the color conversion device according to the invention is appropriate from the view-point of mass production.

The setting and writing of the coefficients during manufacture of the color conversion device can also be made when the coefficient storage is other than a read-only memory. In such a case, the setting and writing of the coefficients may be conducted using the coefficient setting unit 15 forming part of the color conversion device or a separate unit (not shown) which has an equivalent function, but which forms part of the manufacturing device.

WHAT IS CLAIMED IS:-

1. A color conversion device for performing pixel-by-pixel color conversion from a first set of three color data representing red, green and blue, or cyan, magenta and yellow, into a second set of three color data representing red, green and blue, or cyan, magenta, and yellow, said device comprising:

first calculation means for calculating a minimum value α and a maximum value β of said first set of three color data for each pixel;

hue data calculating means for calculating hue data r, g, b, y, m and c based on said first set of three color data, and said minimum and maximum values α and β outputted from said calculating means;

means for generating first comparison-result data based on the hue data outputted from said hue data calculating means;

means for generating second comparison-result data based on said first comparison-result data;

coefficient storage means for storing matrix coefficients for the hue data, the first comparison-result data and the second comparison-result data;

coefficient setting means for setting specified coefficients in said coefficient storage means; and

second calculation means responsive to said hue data, said first comparison-result data, said second comparison-result data, and the coefficients from said coefficient storage means for calculating said second set of three color data representing red, green and blue, or cyan, magenta, and yellow,

said second calculation means performing calculation including matrix calculation performed at least on said hue data, said first comparison-result data, said second

comparison-result data, and the coefficients from said coefficient storage means.

2. The color conversion device according to claim 1, wherein said second calculation means performs said matrix calculation on said hue data, said first comparison-result data, said second comparison-result data, and the coefficients from said coefficient storage means, and further includes synthesizing means for adding said minimum value α from said first calculation means to the results of said matrix calculation.

3. The color conversion device according to claim 2, wherein

said coefficient storage means outputs predetermined matrix coefficients E_{ij} ($i = 1$ to 3 , $j = 1$ to 3), and F_{ij} ($i = 1$ to 3 , $j = 1$ to 12), and

said second calculation means performs the calculation using the hue data, said said first comparison-result data, said second comparison-result data, said minimum value α from said calculating means, and said matrix coefficients to determine said second set of three color data representing red, green and blue, denoted by R_o , G_o and B_o , in accordance with the following formula (1):

$$\begin{bmatrix} R_o \\ G_o \\ B_o \end{bmatrix} = (E_{ij}) \begin{bmatrix} r \\ g \\ b \end{bmatrix} + (F_{ij}) \begin{bmatrix} h1r \\ h1g \\ h1b \\ h1c \\ h1m \\ h1y \\ h2ry \\ h2rm \\ h2gy \\ h2gc \\ h2bm \\ h2bc \end{bmatrix} + \begin{bmatrix} \alpha \\ \alpha \\ \alpha \end{bmatrix} \quad \dots(1)$$

wherein h1r, h1g, h1b, h1c, h1m and h1y denote said first comparison-result data, and h2ry, h2rm, h2gy, h2gc, h2bm and h2bc denote said second comparison result data.

4. The color conversion device according to claim 2, wherein

said coefficient storage means outputs predetermined matrix coefficients Eij (i = 1 to 3, j = 1 to 3), and Fij (i = 1 to 3, j = 1 to 12), and

said second calculation means performs the calculation using the hue data, said said first comparison-result data, said second comparison-result data, said minimum value α from said calculating means, and said matrix coefficients to determine said second set of three color data representing cyan, magenta and yellow denoted by Co, Mo and Yo, in accordance with the following formula (2):

$$\begin{bmatrix} Co \\ Mo \\ Yo \end{bmatrix} = (E_{ij}) \begin{bmatrix} c \\ m \\ y \end{bmatrix} + (F_{ij}) \begin{bmatrix} h1r \\ h1g \\ h1b \\ h1c \\ h1m \\ h1y \\ h2ry \\ h2rm \\ h2gy \\ h2gc \\ h2bm \\ h2bc \end{bmatrix} + \begin{bmatrix} \alpha \\ \alpha \\ \alpha \end{bmatrix} \quad \dots (2)$$

wherein h1r, h1g, h1b, h1c, h1m and h1y denote said first comparison-result data, and h2ry, h2rm, h2gy, h2gc, h2bm and h2bc denote said second comparison result data.

5. The color conversion device according to claim 1, wherein said second calculation means performs said matrix calculation on said hue data, said first comparison-result data, said second comparison-result data, the coefficients

from said coefficient storage means, and said minimum value α from said first calculation means.

6. The color conversion device according to claim 5, wherein

said coefficient storage means outputs predetermined matrix coefficients E_{ij} ($i = 1$ to 3 , $j = 1$ to 3), and F_{ij} ($i = 1$ to 3 , $j = 1$ to 13), and

said second calculation means performs the calculation using the hue data, said said first comparison-result data, said second comparison-result data, said minimum value α from said calculating means, and said matrix coefficients to determine said second set of three color data representing red, green and blue, denoted by R_o , G_o and B_o , in accordance with the following formula (3):

$$\begin{bmatrix} R_o \\ G_o \\ B_o \end{bmatrix} = (E_{ij}) \begin{bmatrix} r \\ g \\ b \end{bmatrix} + (F_{ij}) \begin{bmatrix} h1r \\ h1g \\ h1b \\ h1c \\ h1m \\ h1y \\ h2ry \\ h2rm \\ h2gy \\ h2gc \\ h2bm \\ h2bc \\ \alpha \end{bmatrix} \quad \dots(3)$$

wherein $h1r$, $h1g$, $h1b$, $h1c$, $h1m$ and $h1y$ denote said first comparison-result data, and $h2ry$, $h2rm$, $h2gy$, $h2gc$, $h2bm$ and $h2bc$ denote said second comparison result data.

7. The color conversion device according to claim 5, wherein

said coefficient storage means outputs predetermined matrix coefficients E_{ij} ($i = 1$ to 3 , $j = 1$ to 3), and F_{ij} (i

= 1 to 3, j = 1 to 13), and

said second calculation means performs the calculation using the hue data, said said first comparison-result data, said second comparison-result data, said minimum value α from said calculating means, and said matrix coefficients to determine said second set of three color data representing cyan, magenta and yellow denoted by Co, Mo and Yo, in accordance with the following formula (4):

$$\begin{bmatrix} \text{Co} \\ \text{Mo} \\ \text{Yo} \end{bmatrix} = (\text{Eij}) \begin{bmatrix} \text{c} \\ \text{m} \\ \text{y} \end{bmatrix} + (\text{Fij}) \begin{bmatrix} \text{h1r} \\ \text{h1g} \\ \text{h1b} \\ \text{h1c} \\ \text{h1m} \\ \text{h1y} \\ \text{h2ry} \\ \text{h2rm} \\ \text{h2gy} \\ \text{h2gc} \\ \text{h2bm} \\ \text{h2bc} \\ \alpha \end{bmatrix} \quad \dots(4)$$

wherein h1r, h1g, h1b, h1c, h1m and h1y denote said first comparison-result data, and h2ry, h2rm, h2gy, h2gc, h2bm and h2bc denote said second comparison result data.

8. The color conversion device according to claim 1, wherein

said first set of three color data represent red, green and blue,

said second set of three color data represent red, green and blue, and

said hue data calculation means calculates the hue data r, g, b, y, m, c by subtraction in accordance with:

$$r = R_i - \alpha,$$

$$g = G_i - \alpha,$$

$$b = B_i - \alpha,$$

$$\begin{aligned} y &= \beta - B_i, \\ m &= \beta - G_i, \text{ and} \\ c &= \beta - R_i, \end{aligned}$$

wherein R_i , G_i and B_i represent said first set of three color data.

9. The color conversion device according to claim 1, wherein

said first set of three color data represent cyan, magenta and yellow,

said second set of three color data represent red, green and blue,

said device further comprises means for determining complement of said first set of three color data, and

said hue data calculation means calculates the hue data r , g , b , y , m , c by subtraction in accordance with:

$$\begin{aligned} r &= R_i - \alpha, \\ g &= G_i - \alpha, \\ b &= B_i - \alpha, \\ y &= \beta - B_i, \\ m &= \beta - G_i, \text{ and} \\ c &= \beta - R_i, \end{aligned}$$

wherein R_i , G_i and B_i represent data produced by the determination of the complement of said first set of three color data.

10. The color conversion device according to claim 1, wherein

said first set of three color data represent cyan, magenta and yellow,

said second set of three color data represent cyan, magenta and yellow, and

said hue data calculation means calculates the hue data r , g , b , y , m , c by subtraction in accordance with:

$$\begin{aligned}
 r &= \beta - C_i, \\
 g &= \beta - M_i, \\
 b &= \beta - Y_i, \\
 y &= Y_i - \alpha, \\
 m &= M_i - \alpha, \text{ and} \\
 c &= C_i - \alpha.
 \end{aligned}$$

wherein C_i , M_i and Y_i represent said first set of three color data.

11. The color conversion device according to claim 1, wherein

said first set of three color data represent red, green and blue,

said second set of three color data represent cyan, magenta and yellow,

said device further comprises means for determining complement of said first set of three color data, and

said hue data calculation means calculates the hue data r , g , b , y , m , c by subtraction in accordance with:

$$\begin{aligned}
 r &= \beta - C_i, \\
 g &= \beta - M_i, \\
 b &= \beta - Y_i, \\
 y &= Y_i - \alpha, \\
 m &= M_i - \alpha, \text{ and} \\
 c &= C_i - \alpha.
 \end{aligned}$$

wherein C_i , M_i and Y_i represent data produced by the determination of the complement of said first set of three color data.

12. The color conversion device according to claim 1, wherein

said first comparison-result data generating means determines the comparison-result data among the hue data r , g and b , and the comparison-result data among the hue data

y, m and c, and

said second comparison-result data generating means comprises multiplying means for multiplying the first comparison-result data outputted from said first comparison-result data generating means with specific calculation coefficients, and means for determining the comparison-result data based on the outputs of said multiplication means.

13. The color conversion device according to claim 12, wherein

said first comparison-result data generating means determines the first comparison-result data:

h1r = min (m, y),
 h1g = min (y, c),
 h1b = min (c, m),
 h1c = min (g, b),
 h1m = min (b, r), and
 h1y = min (r, g),

(with min (A, B) representing the minimum value of A and B),

said second comparison-result data generating means determines the second comparison-result data:

h2ry = min (aq1*h1y, ap1*h1r),
 h2rm = min (aq2*h1m, ap2*h1r),
 h2gy = min (aq3*h1y, ap3*h1g),
 h2gc = min (aq4*h1c, ap4*h1g),
 h2bm = min (aq5*h1m, ap5*h1b), and
 h2bc = min (aq6*h1c, ap6*h1m).

14. The color conversion device according to claim 12, wherein

said multiplying means in said second comparison-result data generating means performs calculation on said first comparison result-data and said calculation coefficients by

setting said calculation coefficients aq_1 to aq_6 and ap_1 to ap_6 to integral values of 2^n , with n being an integer, and by bit shifting.

15. The color conversion device according to claim 1, wherein each of said first comparison-result data is determined from two of the hue data and is effective for only one of the six hues of red, green, blue, cyan, magenta and yellow.

16. The color conversion device according to claim 1, wherein each of said second comparison-result data is determined from two of the first comparison-result data and is effective for only one of the six inter-hue areas of red-yellow, yellow-green, green-cyan, cyan-blue, blue-magenta, and magenta-red.

17. The color conversion device according to claim 1, wherein

said coefficient storage means outputs specified matrix coefficients E_{ij} ($i = 1$ to 3 , $j = 1$ to 3) based on a formula (5) below:

$$(E_{ij}) = \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix} \quad \dots (5)$$

18. The color conversion device according to claim 1, wherein

said first calculation means calculates a maximum value β and a minimum value α using said first set of three color data, and generates an identification code indicating the hue data which is of a value zero, and

said coefficient storage means outputs said matrix

coefficients based on the identification code outputted from said first calculation means, and

said second calculation means performs matrix calculation using the coefficient from said coefficient storage means to produce said second set of three color data based on the identification code outputted from said first calculation means.

19. A method of manufacturing a color conversion device which is for use with an input or output device and which performs pixel-by-pixel color conversion from a first set of three color data representing red, green and blue, or cyan, magenta and yellow, into a second set of three color data representing red, green and blue, or cyan, magenta, and yellow, said color conversion device comprising:

first calculation means for calculating a minimum value α and a maximum value β of said first set of three color data for each pixel;

hue data calculating means for calculating hue data r , g , b , y , m and c based on said first set of three color data, and said minimum and maximum values α and β outputted from said calculating means;

means for generating first comparison-result data based on the hue data outputted from said hue data calculating means;

means for generating second comparison-result data based on said first comparison-result data;

coefficient storage means for storing coefficients for the hue data, the first comparison-result data and the second comparison-result data; and

second calculation means responsive to said hue data, said first comparison-result data, said second comparison-result data, and the coefficients from said coefficient storage means for calculating said second set of three color

data representing red, green and blue, or cyan, magenta, and yellow,

said second calculation means performing calculation including matrix calculation performed at least on said hue data, said first comparison-result data, said second comparison-result data, and the coefficients from said coefficient storage means, said method comprising the steps of:

(a) producing a device which includes the above-recited elements, but in which said coefficients are not stored in said storage means; and

(b) writing said coefficients in said coefficient storage taking into consideration the characteristics of the device with which the color conversion device is to be used.

ABSTRACT

Responsive to image data of three colors, six hue data are obtained, and then first comparison-result data each relating to one of the six hues, and second comparison-result data each relating to one of the six inter-hue areas are obtained. Matrix calculation is performed on the first comparison-result data, and the second comparison-result data, using coefficients. By varying the coefficients, adjustment can be made to only the target hue or inter-hue area, without affecting other hues and inter-hue areas. Thus, the six hues and six inter-hue areas can be varied independently, and the large-capacity memory is not required. The coefficients used for the matrix calculation are stored in a storage, which can be set and altered by the use of a setting unit.

FIG. 1

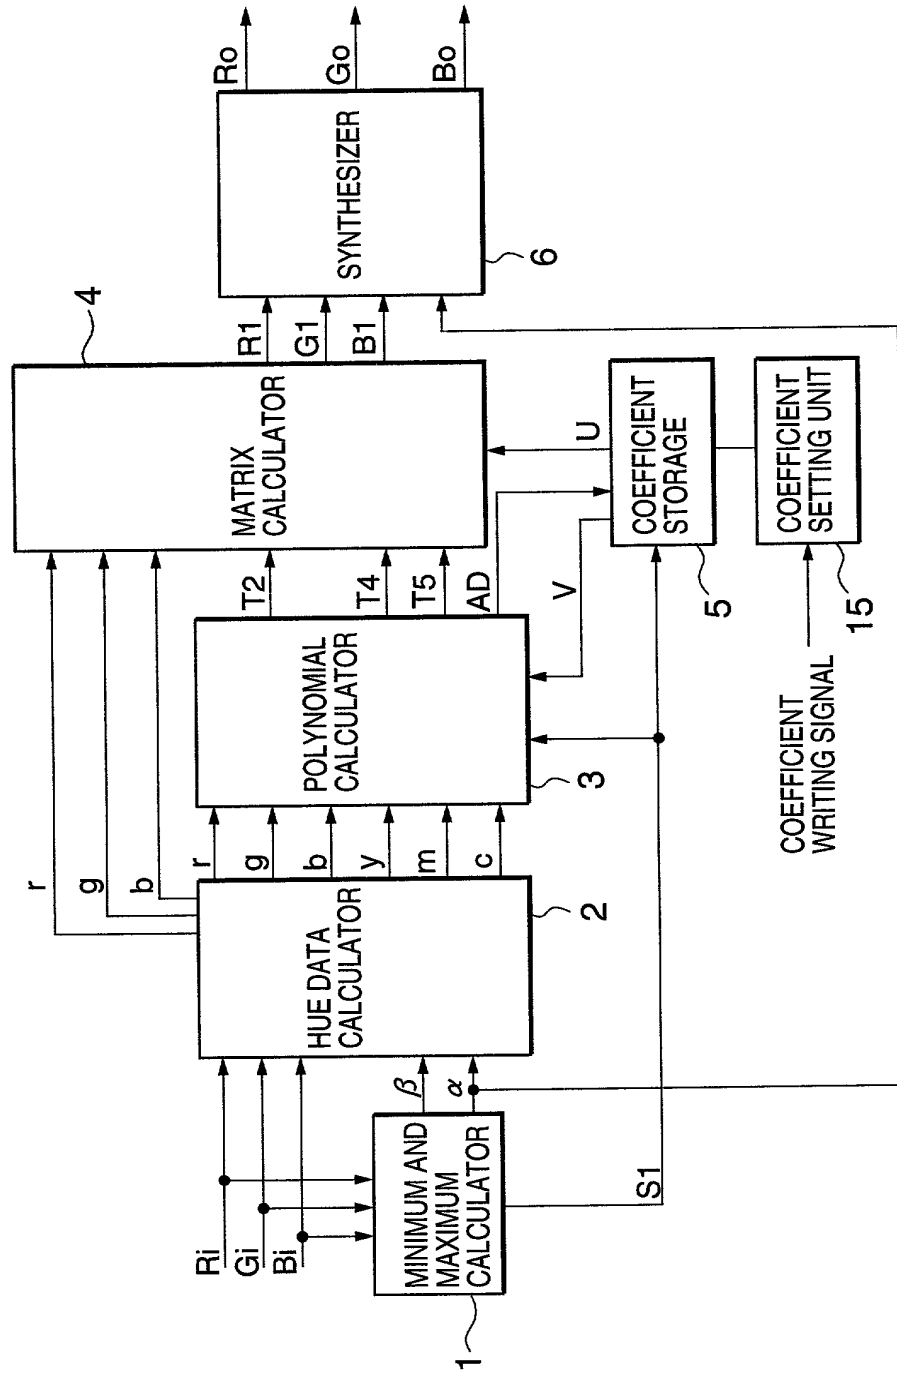


FIG. 2

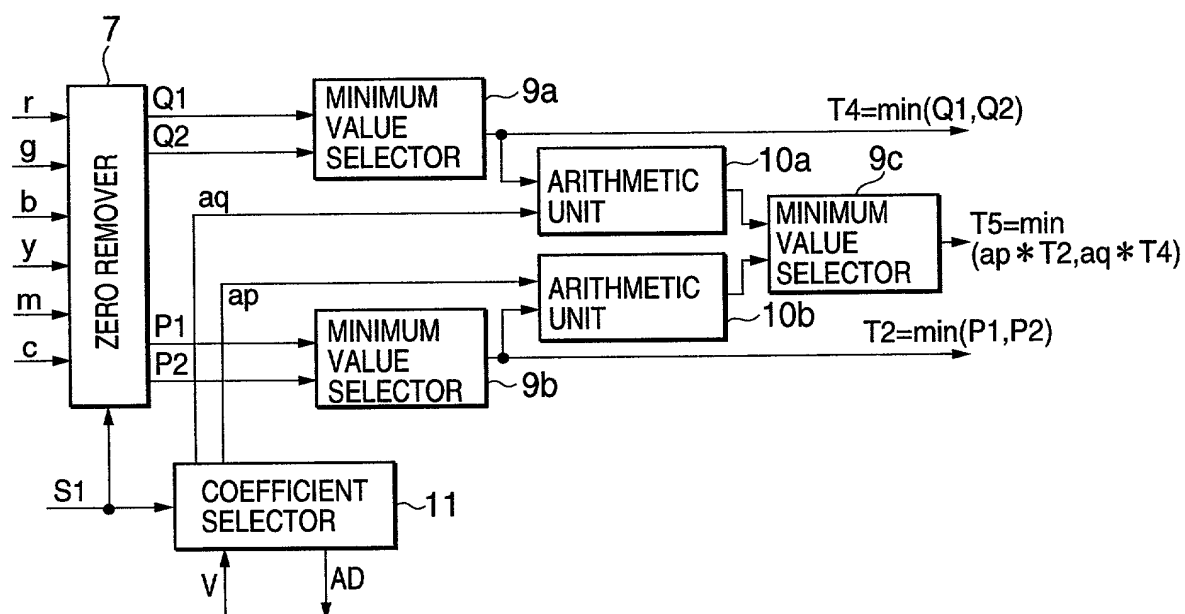


FIG. 3

IDENTIFICATION CODE S1	MAXIMUM VALUE β	MINIMUM VALUE α	HUE DATA OF A VALUE ZERO
0	R_i	G_i	g, c
1	R_i	B_i	b, c
2	G_i	R_i	r, m
3	G_i	B_i	b, m
4	B_i	R_i	r, y
5	B_i	G_i	g, y

$$* r = R_i - \alpha, g = G_i - \alpha, b = B_i - \alpha$$

$$y = \beta - B_i, m = \beta - G_i, c = \beta - R_i$$

FIG. 4

IDENTIFICATION CODE S1	Q1	Q2	P1	P2
0	r	b	m	y
1	r	g	y	m
2	g	b	c	y
3	g	r	y	c
4	b	g	c	m
5	b	r	m	c

FIG. 5

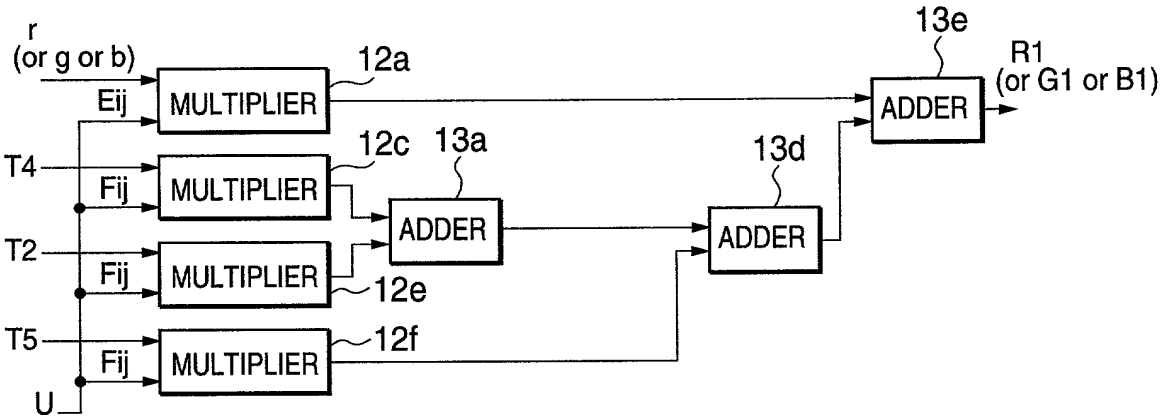


FIG. 6A




FIG. 6B




FIG. 6C




FIG. 6D




FIG. 6E




FIG. 6F

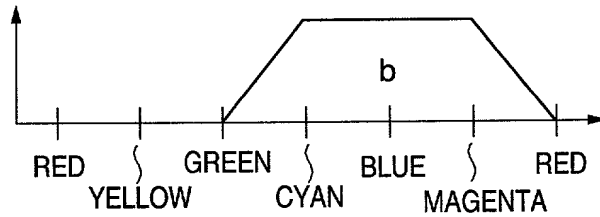


FIG. 7A




FIG. 7B




FIG. 7C




FIG. 7D




FIG. 7E




FIG. 7F

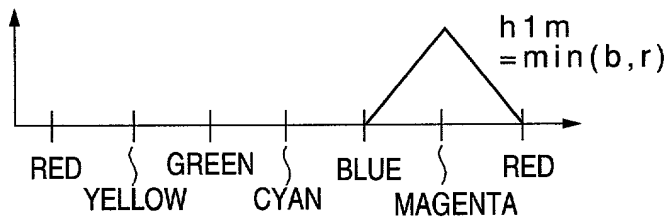


FIG. 8A




FIG. 8B




FIG. 8C




FIG. 8D




FIG. 8E




FIG. 8F

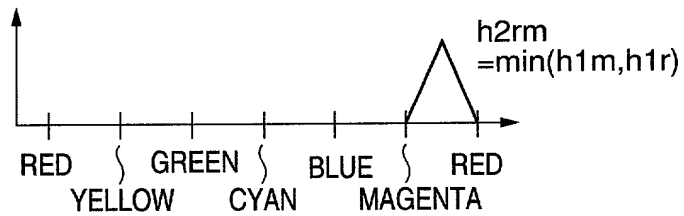


FIG. 9A




FIG. 9B




FIG. 9C



FIG. 9D




FIG. 9E




FIG. 9F

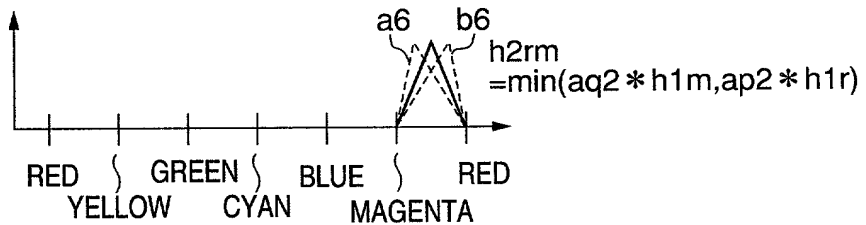


FIG. 10A

HUE	EFFECTIVE FIRST COMPARISON- RESULT DATA
RED	h1r
GREEN	h1g
BLUE	h1b
CYAN	h1c
MAGENTA	h1m
YELLOW	h1y

FIG. 10B

INTER-HUE AREA	EFFECTIVE SECOND COMPARISON- RESULT DATA
RED-YELLOW	h2ry
YELLOW-GREEN	h2gy
GREEN-CYAN	h2gc
CYAN-BLUE	h2bc
BLUE-MAGENTA	h2bm
MAGENTA-RED	h2rm

FIG. 11

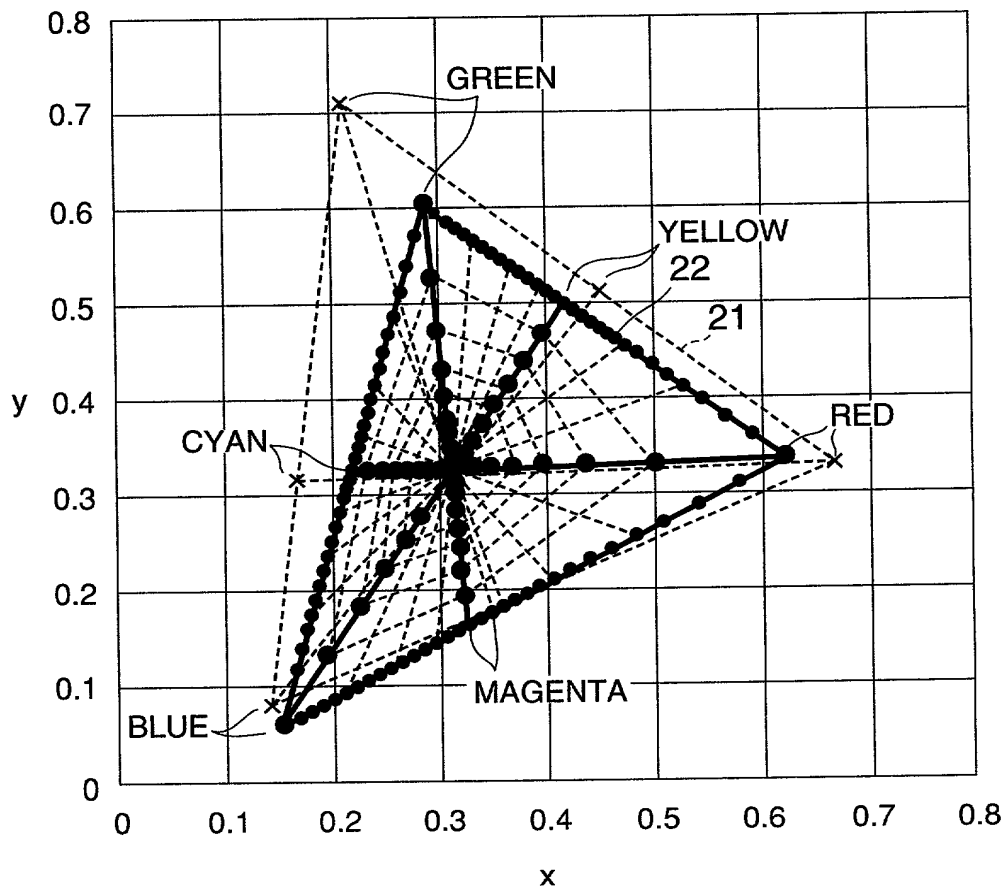


FIG. 12

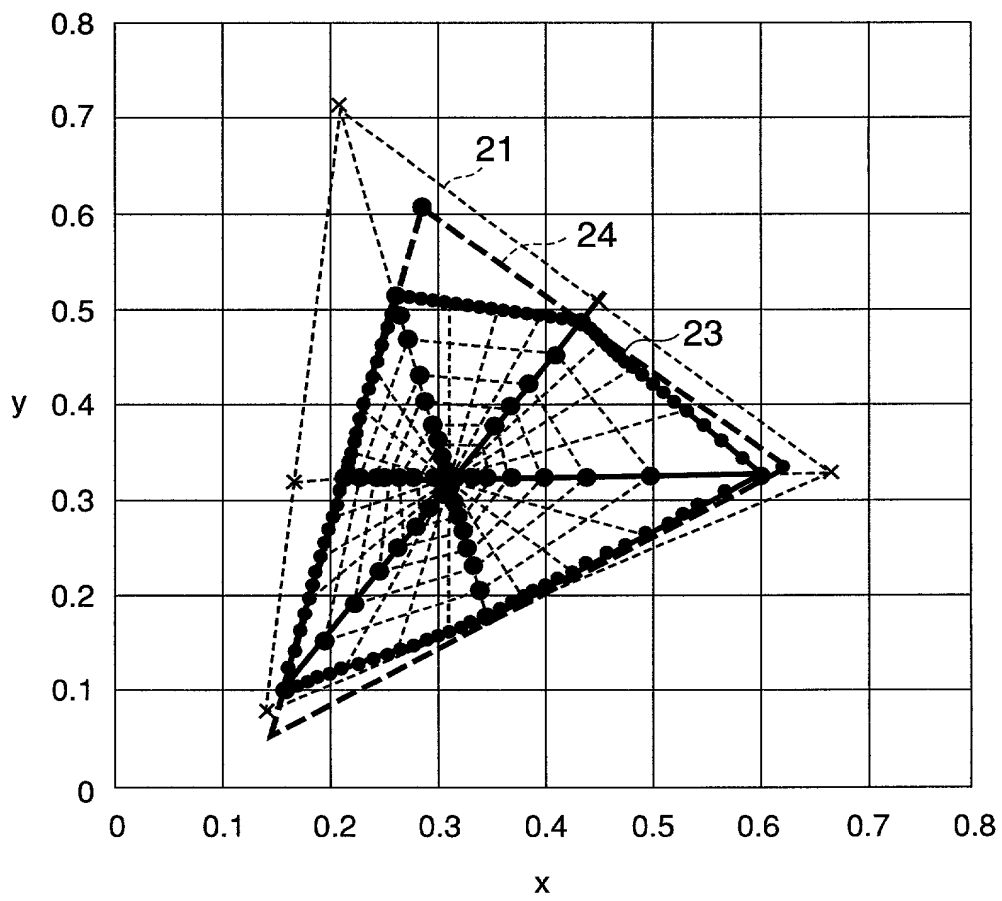


FIG. 13

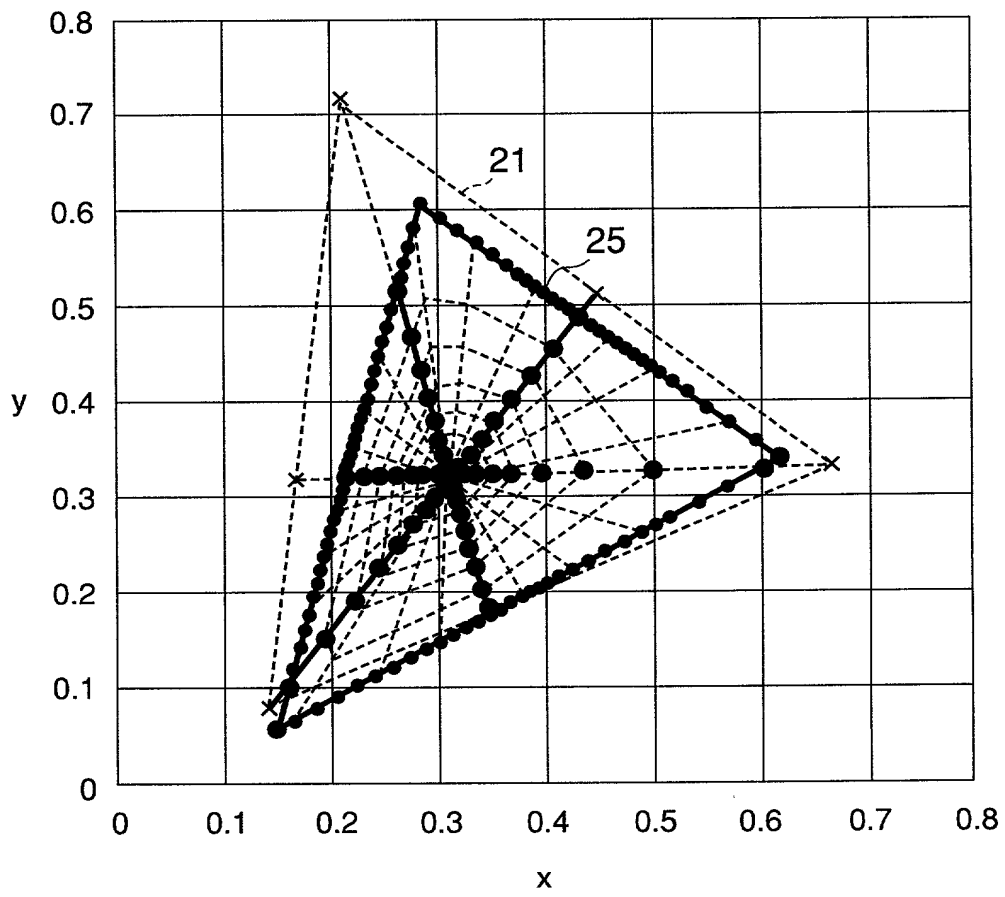


FIG. 14

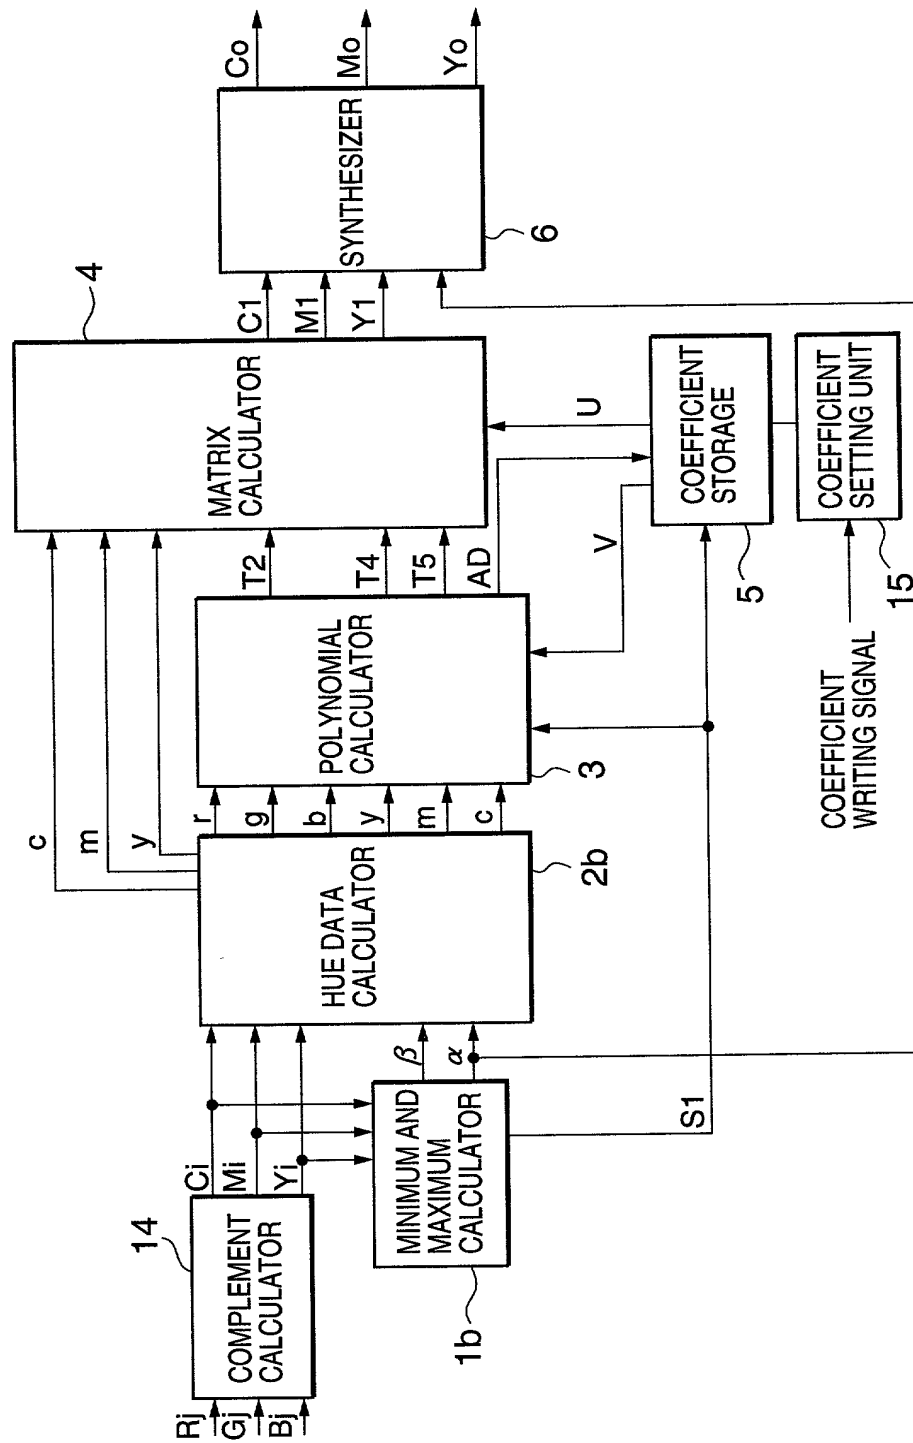


FIG. 15

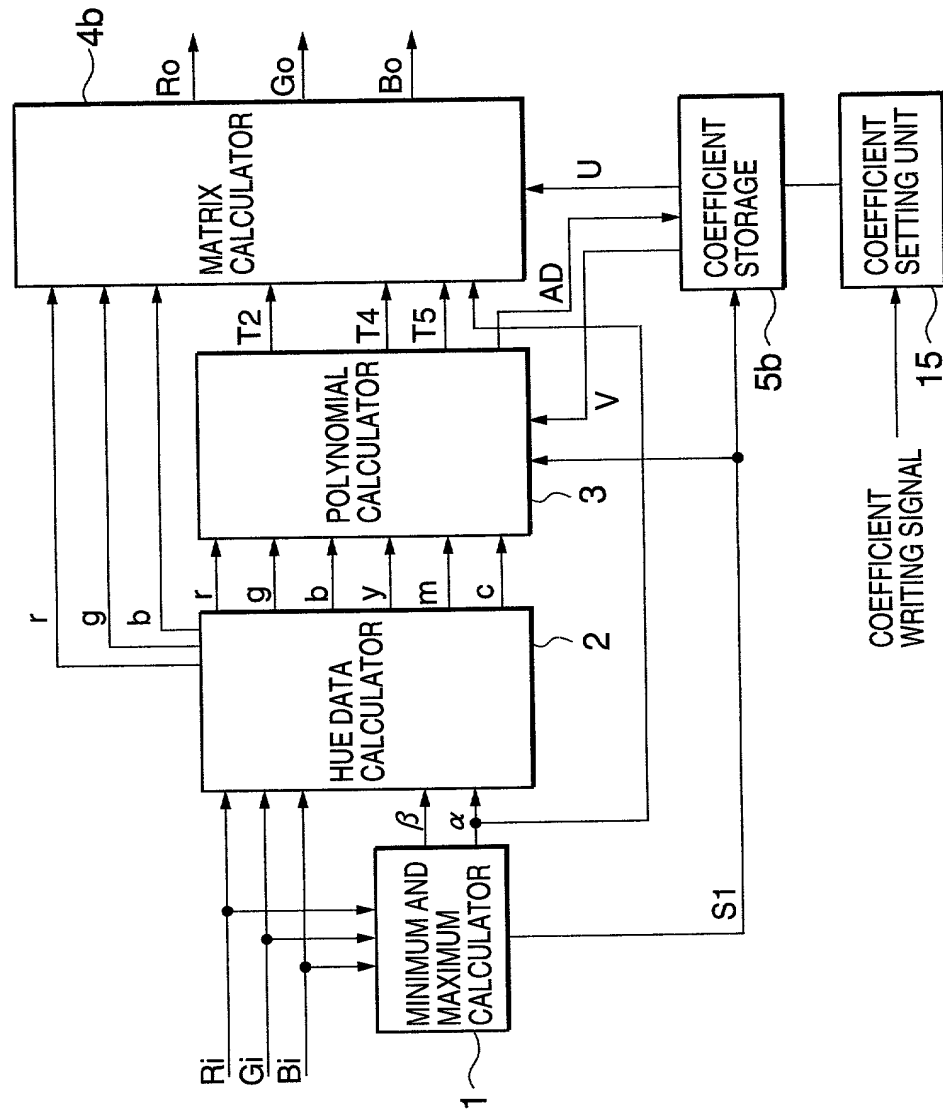


FIG. 16

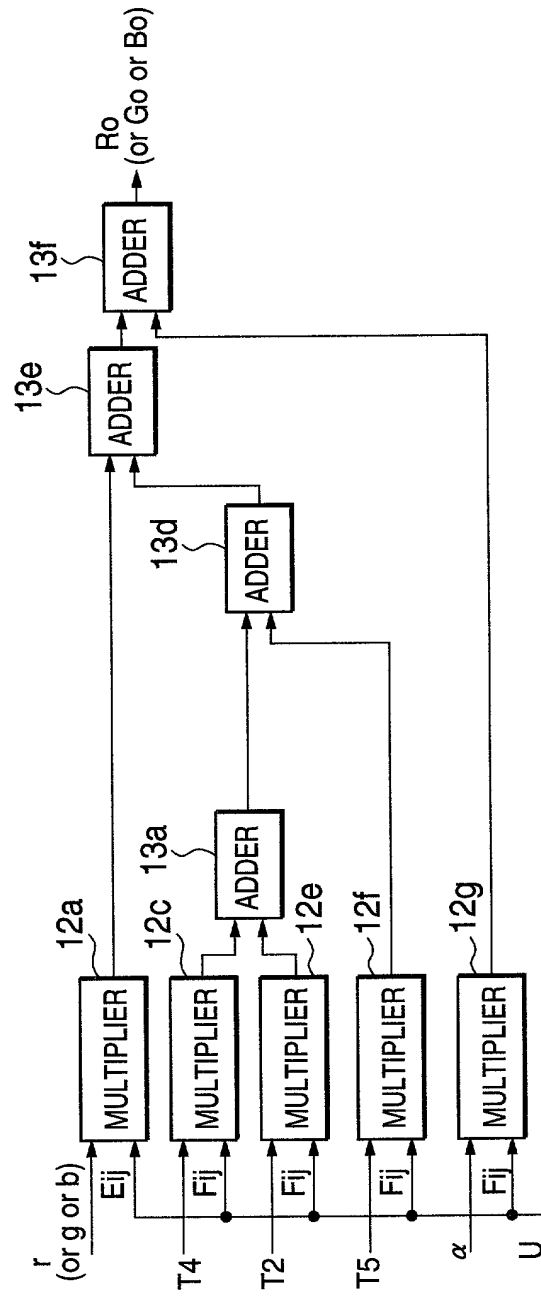


FIG. 17

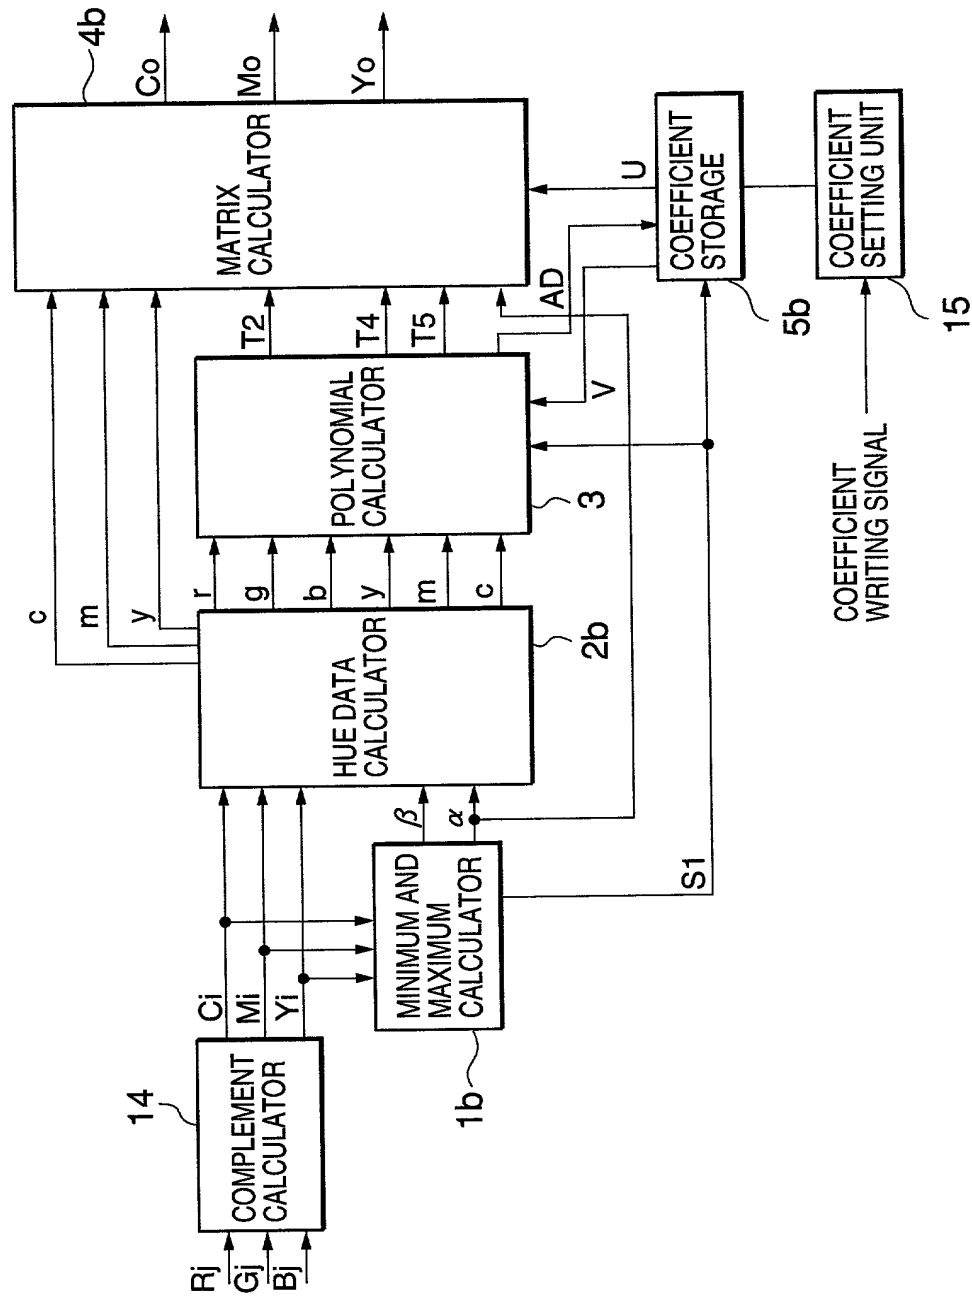


FIG. 18

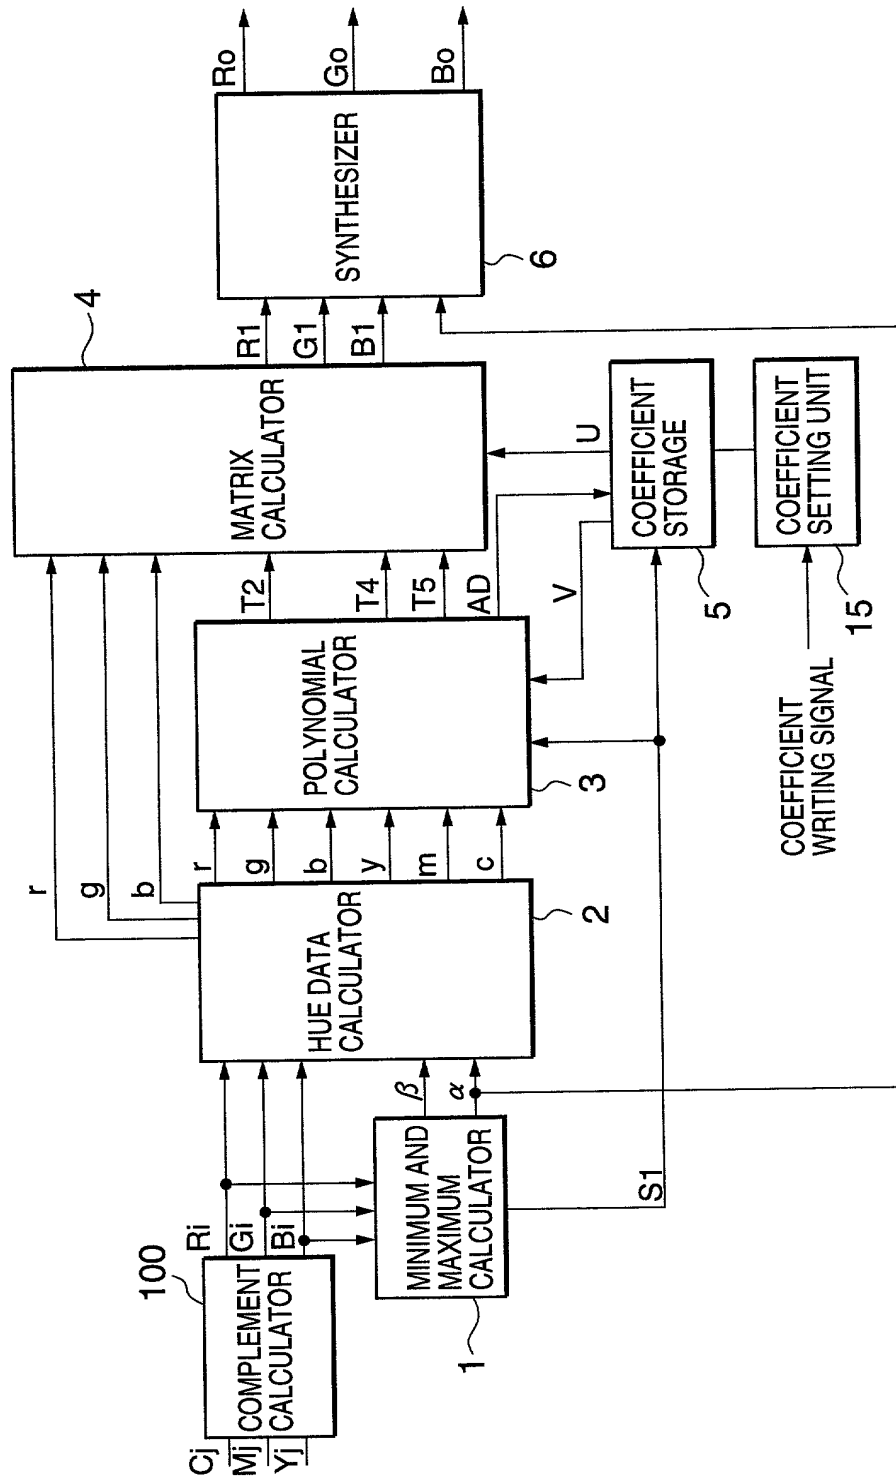


FIG. 19
PRIOR ART

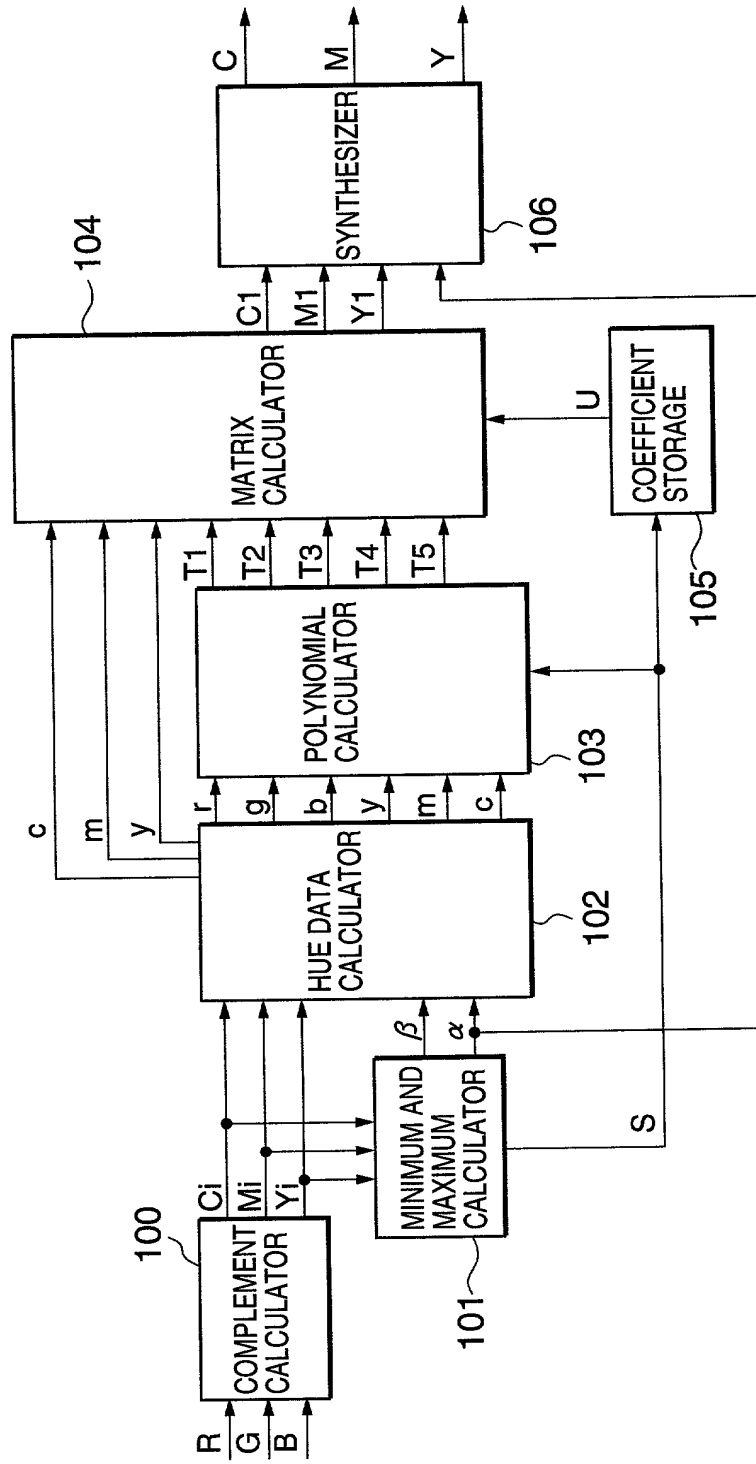


FIG. 20A
PRIOR ART




FIG. 20B
PRIOR ART




FIG. 20C
PRIOR ART




FIG. 20D
PRIOR ART




FIG. 20E
PRIOR ART




FIG. 20F
PRIOR ART

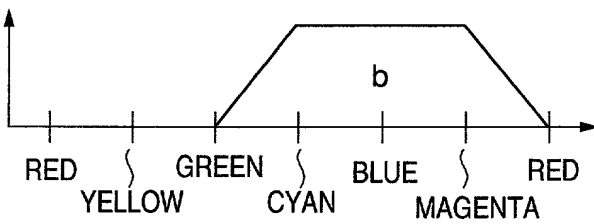


FIG. 21A
PRIOR ART




FIG. 21B
PRIOR ART




FIG. 21C
PRIOR ART




FIG. 21D
PRIOR ART




FIG. 21E
PRIOR ART





FIG. 21F
PRIOR ART

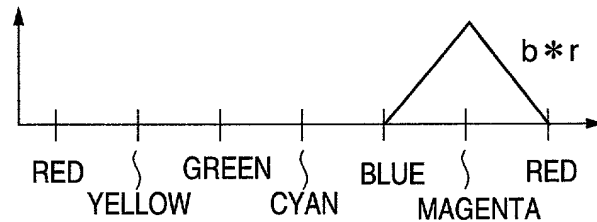

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

COLOR CONVERSION DEVICE AND METHOD

OF MANUFACTURING THE SAME

上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日に提出され、米国出願番号または特許協定条約国際出願番号を _____ とし、
 （該当する場合） _____ に訂正されました。

☐ was filed on _____
 as United States Application Number or
 PCT International Application Number
 _____ and was amended on
 _____ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されたとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration

(日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior Foreign Application(s)

外国での先行出願

291897/99

(Number)
(番号)

JAPAN

(Country)
(国名)(Number)
(番号)(Country)
(国名)

October 14, 1999

(Day/Month/Year Filed)
(出願年月日)(Day/Month/Year Filed)
(出願年月日)**Priority Not Claimed**

優先権主張なし

☐☐

私は、第35編米国法典119条(e)項に基づいて下記の米国外特許出願規定に記載された権利をここに主張いたします。

(Application No.)
(出願番号)(Filing Date)
(出願日)(Application No.)
(出願番号)(Filing Date)
(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国外特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国外特許出願に開示されていない限り、その先行米国外出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.)
(出願番号)(Filing Date)
(出願日)(Application No.)
(出願番号)(Filing Date)
(出願日)(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じることに基づき表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行えば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration
(日本語宣言書)

委任状: 私は下記の発明者として、本出願に関する一切の
手続きを米特許商標局に対して遂行する弁理士または代理人
として、下記の者を指名いたします。(弁理士、または代理
人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint
the following attorney(s) and/or agent(s) to prosecute this
application and transact all business in the Patent and Trademark
Office connected therewith (list name and registration number)

TERRELL C. BIRCH (Reg. No. 19,382)
RAYMOND C. STEWART (Reg. No. 21,066)
JOSEPH A. KOLASCH (Reg. No. 22,463)
ANTHONY L. BIRCH (Reg. No. 26,122)

JAMES M. SLATTERY (Reg. No. 28,380)
BERNARD L. SWEENEY (Reg. No. 24,448)
MICHAEL K. MUTTER (Reg. No. 29,680)
CHARLES GORENSTEIN (Reg. No. 29,271)

GERALD M. MURPHY (Reg. No. 28,977)
LEONARD R. SVENSSON (Reg. No. 30,330)
TERRY L. CLARK (Reg. No. 32,644)
ANDREW D. MEIKLE (Reg. No. 32,868)

MARC S. WEINER (Reg. No. 32,181)
ANDREW F. REISH (Reg. No. 33,443)
JOE M. MUNCY (Reg. No. 32,334)
C. JOSEPH FARACI (Reg. No. 32,350)

書類送付先

Send Correspondence to:

BIRCH, STEWART, KOLASCH & BIRCH, LLP
P.O. BOX 747
FALLS CHURCH, VA 22040-0747
TEL: (703) 205-8000

直接電話連絡先: (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

BIRCH, STEWART, KOLASCH & BIRCH, LLP
TEL: (703) 205-8000

唯一または第一発明者名	Full name of sole or first inventor	
	Shuichi Kagawa	
発明者の署名	日付	Date
	Inventor's signature	October 2, 2000
住所	Residence	
	TOKYO, JAPAN	
国籍	Citizenship	
	Japanese	
私書箱	Post Office Address	
	c/o Mitsubishi Denki Kabushiki Kaisha	
	2-3, Marunouchi 2-chome, Chiyoda-ku,	
	TOKYO 100-8310 JAPAN	
第二共同発明者	Full name of second joint inventor, if any	
	Hiroaki Sugiura	
第二共同発明者	日付	Date
	Second inventor's signature	October 2, 2000
住所	Residence	
	TOKYO, JAPAN	
国籍	Citizenship	
	Japanese	
私書箱	Post Office Address	
	c/o Mitsubishi Denki Kabushiki Kaisha	
	2-3, Marunouchi 2-chome, Chiyoda-ku,	
	TOKYO 100-8310 JAPAN	

(第三以降の共同発明者についても同様に記載し、署名をす
ること)

(Supply similar information and signature for third and subsequent
joint inventors.)